





أكتروس  
**ACTROCASPUMP**



# Company profile

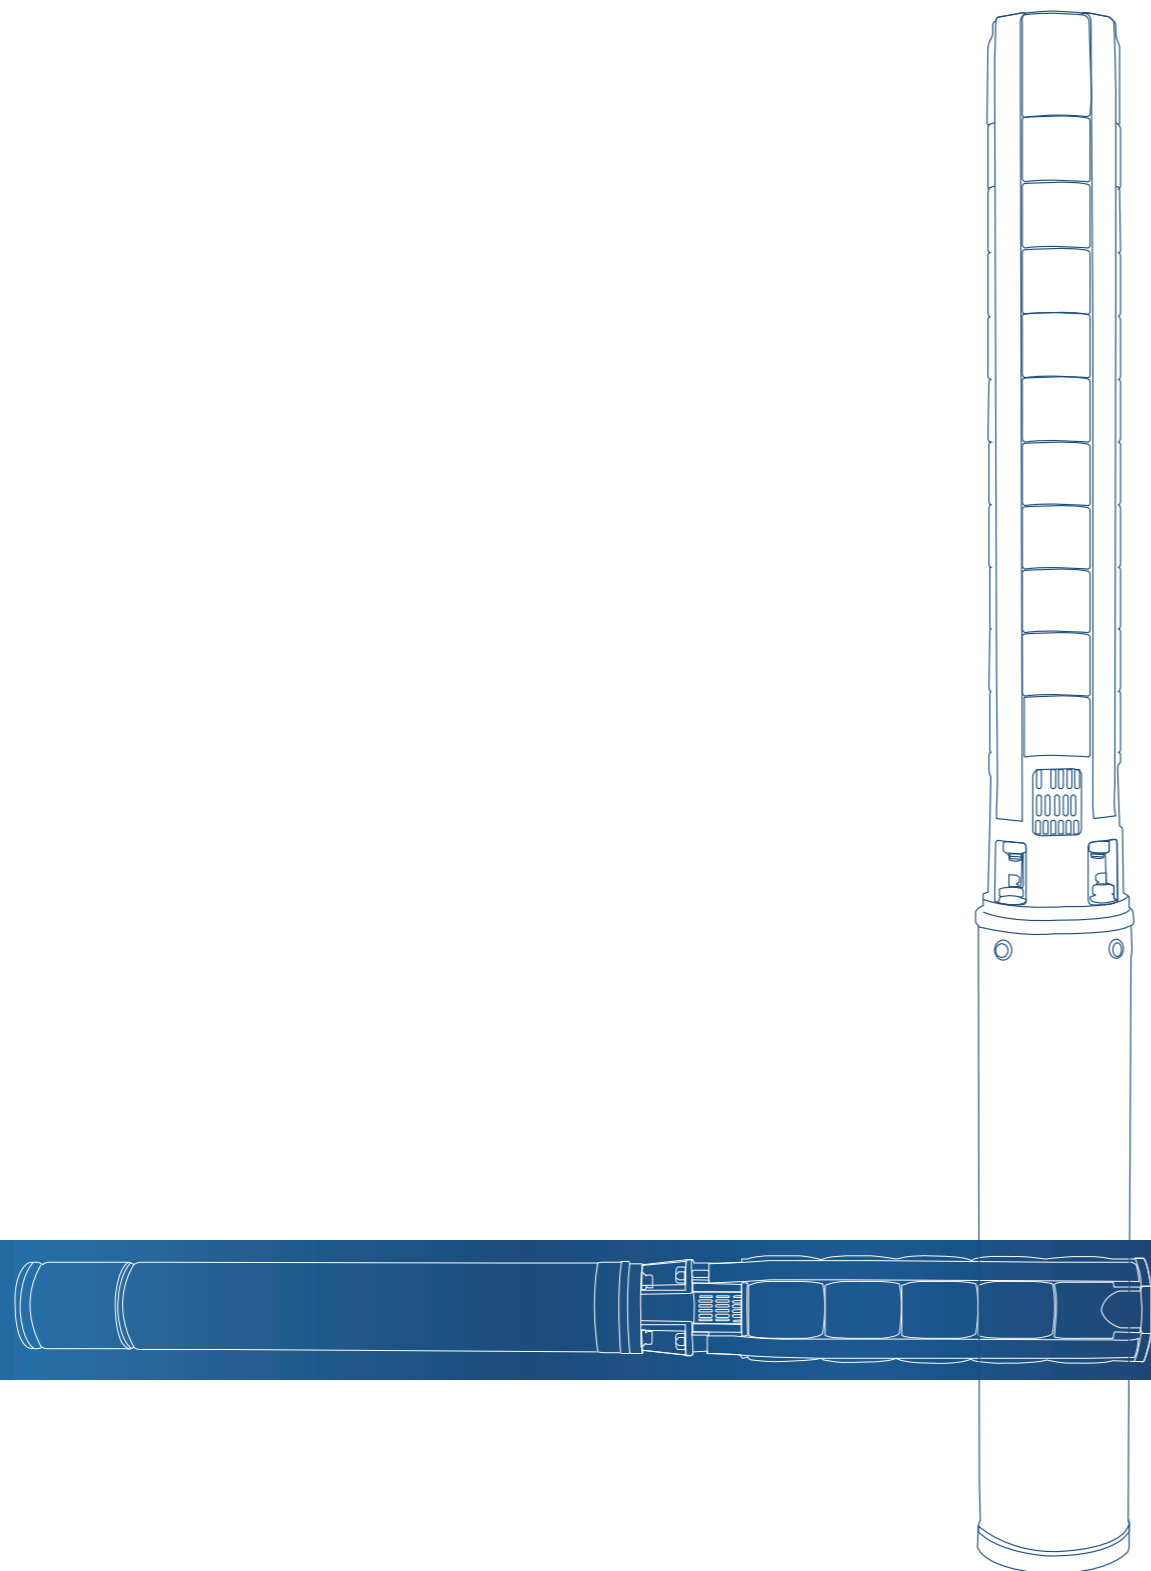

# CONTENTS 目录



<b>3SP 2</b>	<b>4SP 5</b>
<b>4SP 2</b>	<b>4SP 8</b>
<b>4SP 3</b>	<b>4SP 14</b>
<b>STAINLESS STEEL SUBMERSIBLE PUMPS</b>	
—	<b>01-07</b>



<b>5SP 8</b>	<b>5SP 20</b>
<b>5SP 10</b>	<b>5SP 25</b>
<b>5SP 15</b>	<b>5SP 30</b>
<b>不锈钢潜水泵 STAINLESS STEEL SUBMERSIBLE PUMPS</b>	
—	<b>08-13</b>



<b>6SP 17</b>	<b>6SP 30</b>
<b>6SP 20</b>	<b>6SP 32</b>
<b>6SP 22</b>	
<b>不锈钢潜水泵 STAINLESS STEEL SUBMERSIBLE PUMPS</b>	
—	<b>14-19</b>



<b>6SP 40</b>	
<b>6SP 46</b>	
<b>6SP 60</b>	
<b>不锈钢潜水泵 STAINLESS STEEL SUBMERSIBLE PUMPS</b>	
—	<b>20-22</b>



<b>8SP 77</b>	
<b>8SP 95</b>	
<b>8SP 120</b>	
<b>不锈钢潜水泵 STAINLESS STEEL SUBMERSIBLE PUMPS</b>	
—	<b>23-25</b>



<b>10SP 125</b>	
<b>10SP 160</b>	
<b>不锈钢潜水泵 STAINLESS STEEL SUBMERSIBLE PUMPS</b>	
—	<b>26-27</b>

# 3"

# 3SP2

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




**Applications Environment:**

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

**Pump/Motor 泵/马达**

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter  $\Phi$ 70mm  
最大直径  $\Phi$ 70毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

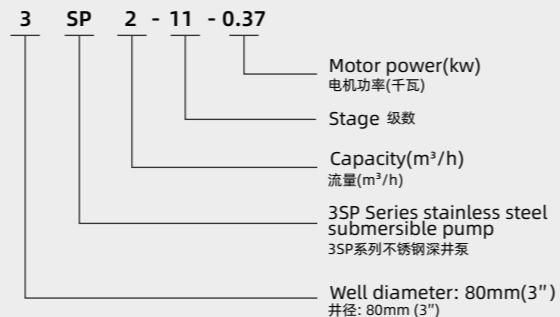


**PERFORMANCE TABLE / 性能表:**

rpm / 转速: 2850 Outlet / 出水口: G1 1/4"

Diffuser Height (导叶壳高度) 20.9mm

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
	KW	Hp	l/min m <sup>3</sup> /h	0	17	25	33	42	50	Length mm
50Hz										
3SP2-8	0.25	0.33	28	26	25	22	17	11	303	
3SP2-11	0.37	0.5	39	36	34	30	24	15	365	
3SP2-17	0.55	0.75	60	56	52	46	37	23	491	
3SP2-24	0.75	1	85	79	74	65	52	33	637	
3SP2-32	1.1	1.5	106	97	92	83	65	40	804	

3SP2 SUBMERSIBLE PUMPS

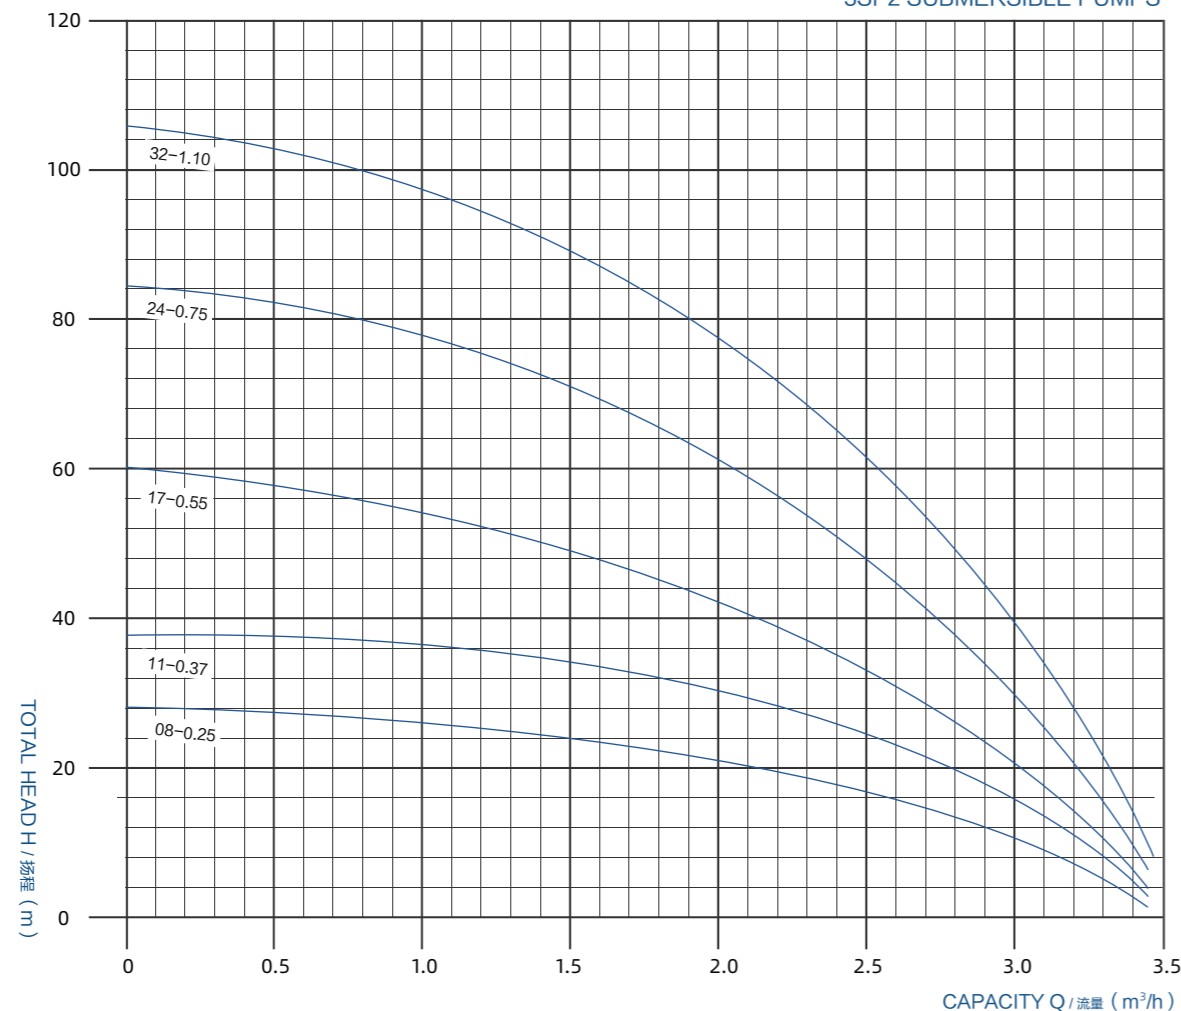

Professional manufacture of stainless steel pumps

# 4SP2

# 4"

## STAINLESS STEEL SUBMERSIBLE PUMPS




**Applications Environment:**

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

**Pump/Motor 泵/马达**

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter  $\Phi$ 95mm  
最大直径  $\Phi$ 95毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

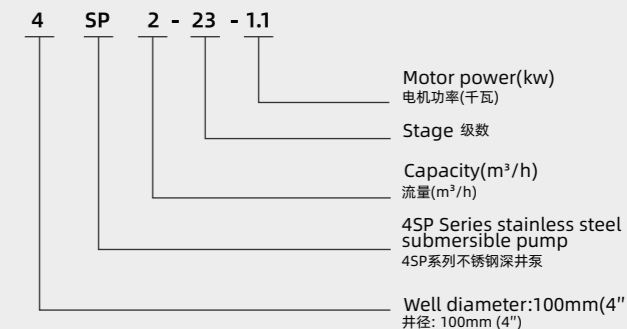


**PERFORMANCE TABLE / 性能表:**

rpm / 转速: 2850 Outlet / 出水口: G1 1/4"

Diffuser Height (导叶壳高度) 21mm

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
	KW	Hp	l/min m <sup>3</sup> /h	0	25	33	42	Length mm	Weight kg	
50Hz										
4SP2-6	0.37	0.5	37	30	24	20	276	2.5		
4SP2-9	0.37	0.5	55	45	36	30	339	3.2		
4SP2-13	0.55	0.75	80	64	52	44	423	4.0		
4SP2-18	0.75	1	110	89	73	66	528	5.0		
4SP2-23	1.1	1.5	141	114	92	77	633	6.2		
4SP2-28	1.5	2	171	139	112	94	738	7.2		
4SP2-33	1.5	2	202	163	132	111	843	8.2		
4SP2-40	2.2	3	245	198	160	135	990	9.7		
4SP2-48	2.2	3	294	237	192	161	1158	11.4		
4SP2-55	3	4	336	272	220	185	1305	12.8		

4SP2 SUBMERSIBLE PUMPS

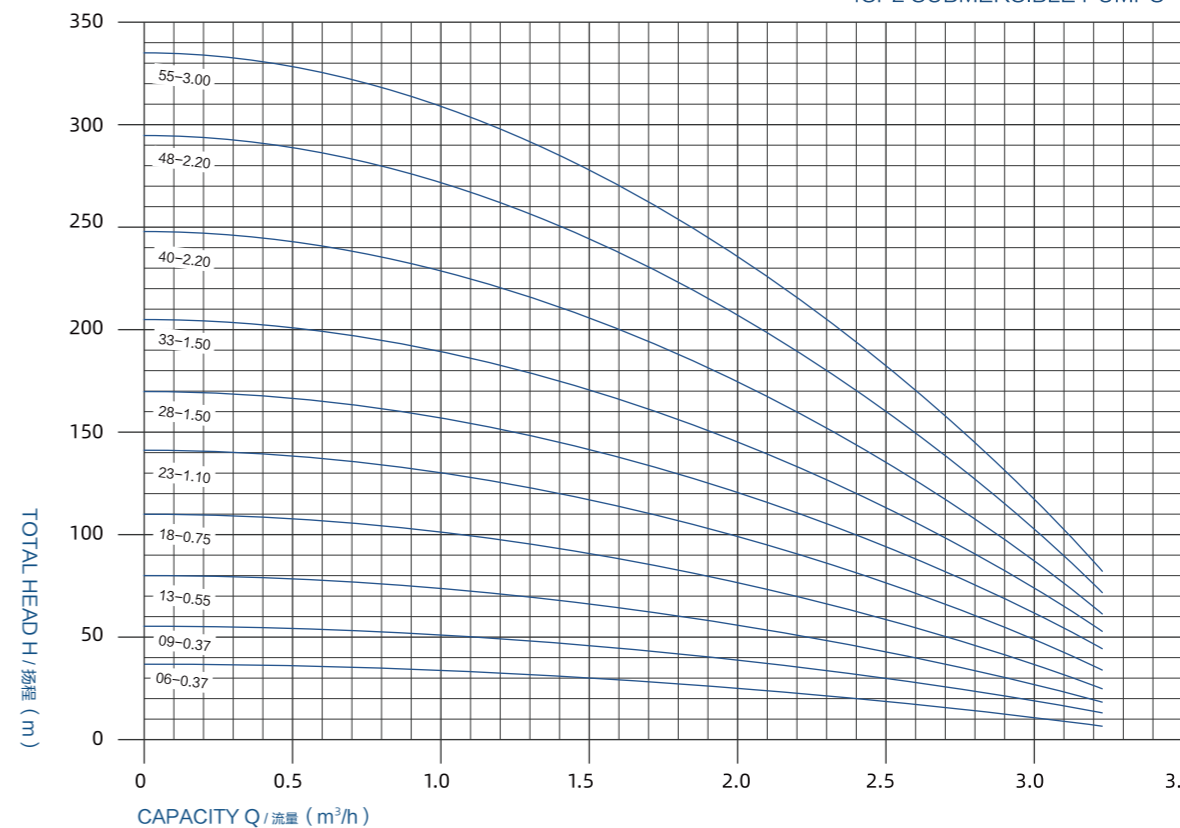

# 4"

# 4SP3

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




**Applications Environment:**

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

**Pump/Motor 泵/马达**

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ95mm  
最大直径 φ95毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

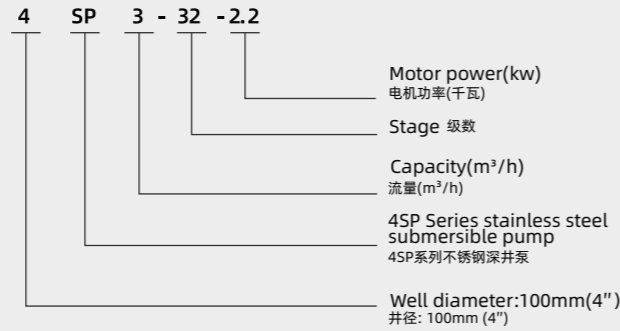

Diffuser Height  
(导叶壳高度)  
21mm




**PERFORMANCE TABLE / 性能表:**

rpm / 转速: 2850 Outlet / 出水口: G1 1/4"

Type/型号	Motor power 功率		Capacity and head/流量和扬程					
	KW	Hp	l/min m³/h	0	33	50	67	Length mm
4SP3-6	0.37	0.5	38	30	26	19	276	2.5
4SP3-9	0.55	0.75	57	45	38	28	339	3.2
4SP3-12	0.75	1	76	60	51	37	402	3.9
4SP3-15	1.1	1.5	95	74	64	46	465	4.4
4SP3-18	1.1	1.5	113	89	77	56	528	5.2
4SP3-22	1.5	2	139	109	94	68	612	6.0
4SP3-25	1.5	2	158	124	107	78	675	6.6
4SP3-32	2.2	3	202	158	137	99	822	8.0
4SP3-39	3	4	246	193	167	121	969	9.6
4SP3-44	3	4	277	218	188	136	1074	10.5
4SP3-52	3.7	5	328	257	222	161	1242	12.3

4SP3 SUBMERSIBLE PUMPS

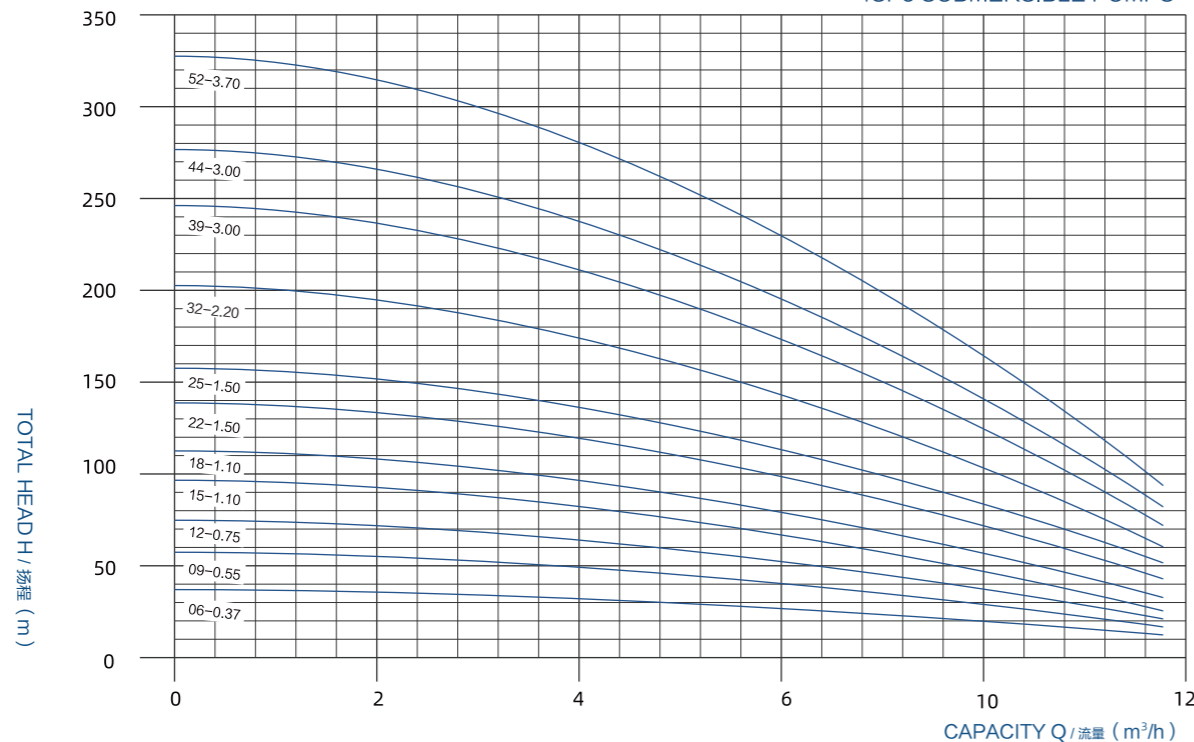

Professional manufacture of stainless steel pumps

# 4SP5

# 4"


## STAINLESS STEEL SUBMERSIBLE PUMPS

**Applications Environment:**

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

**Pump/Motor 泵/马达**

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ95mm  
最大直径 φ95毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

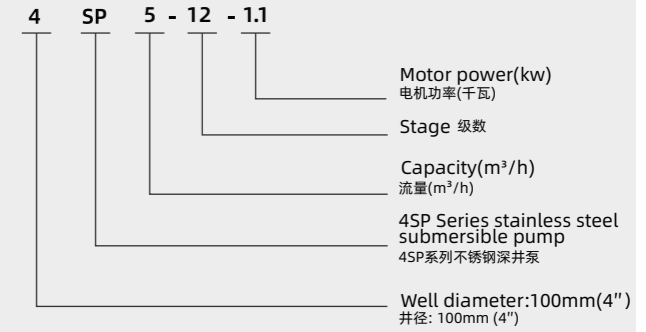


**PERFORMANCE TABLE / 性能表:**

rpm / 转速: 2850 Outlet / 出水口: G1 1/2"

Diffuser Height  
(导叶壳高度)  
21mm

Type/型号	Motor power 功率		Capacity and head/流量和扬程					
	KW	Hp	l/min m³/h	0	50	83	100	Length mm
4SP5-4	0.37	0.5	25	20	16	12	234	2.2
4SP5-6	0.55	0.75	38	30	24	18	276	2.6
4SP5-8	0.75	1	50	40	32	24	318	3.0
4SP5-12	1.1	1.5	76	60	48	36	402	3.9
4SP5-17	1.5	2	107	85	68	51	507	4.8
4SP5-22	2.2	3	139	110	88	66	612	6.0
4SP5-25	2.2	3	159	125	100	75	675	6.8
4SP5-33	3	4	208	165	132	99	843	8.3
4SP5-38	4	5.5	239	190	152	114	948	9.5
4SP5-40	4	5.5	252	200	160	120	990	9.8
4SP5-44	4	5.5	275	220	176	132	1074	10.6
4SP5-52	5.5	7.5	326	260	208	156	1242	12.4
4SP5-65	7.5	10	406	325	260	195	1665	17.8
4SP5-75	7.5	10	470	375	300	225	1895	21.3

4SP5 SUBMERSIBLE PUMPS

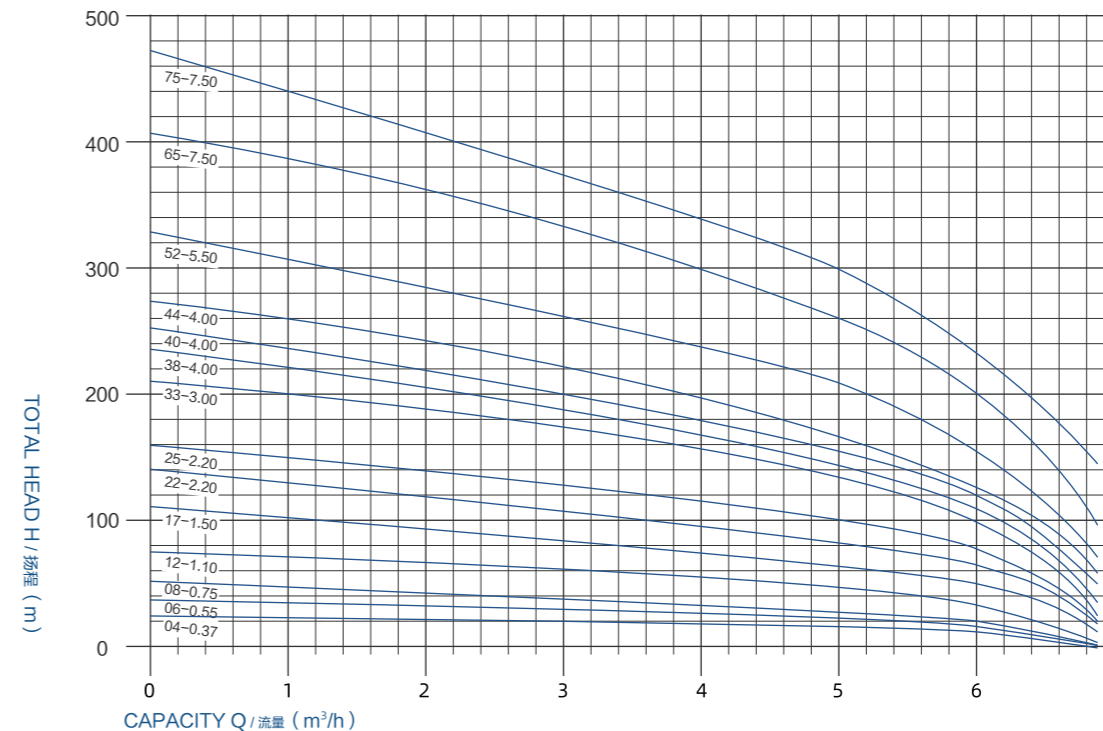

# 4"

# 4SP8

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




► Applications Environment :

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class: E  
绝缘等级: E
- Protection grade: IP 68  
保护等级: IP 68
- Maximum diameter Φ95mm  
最大直径 φ95毫米
- Highest temperature of liquid: 35°C  
液体的最高温度: 35 °c

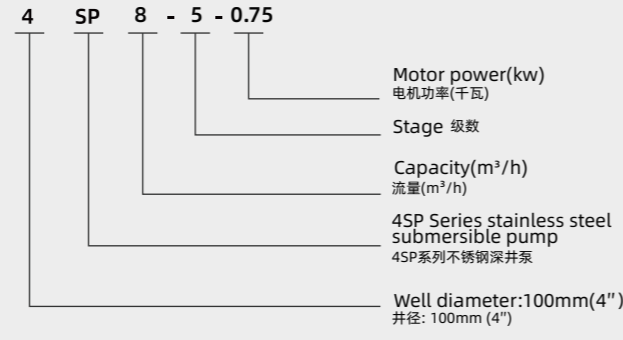


Diffuser Height (导叶壳高度)  
27.5mm

► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2"

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
	KW	Hp	l/min m³/h	0	100	133	167	Length mm	Weight kg
50Hz			Head 扬程 (m)	0	6	8	10		
4SP8-5	0.75	1		32	25	21	15	288	2.6
4SP8-7	1.1	1.5		44	35	30	21	343	3.1
4SP8-10	1.5	2		63	50	43	30	425	4.0
4SP8-12	2.2	3		76	60	51	36	480	4.5
4SP8-14	2.2	3		89	70	60	42	535	5.0
4SP8-18	3	4		114	90	77	54	645	6.0
4SP8-21	4	5.5		133	105	90	63	728	6.9
4SP8-24	4	5.5		152	120	103	72	810	7.8
4SP8-30	5.5	7.5		190	150	129	90	975	9.5
4SP8-35	5.5	7.5		221	175	150	105	1113	11.0
4SP8-40	7.5	10		252	200	172	120	1250	12.4
4SP8-44	7.5	10		278	220	189	132	1360	13.3
4SP8-50	7.5	10		320	250	210	150	1545	15.2

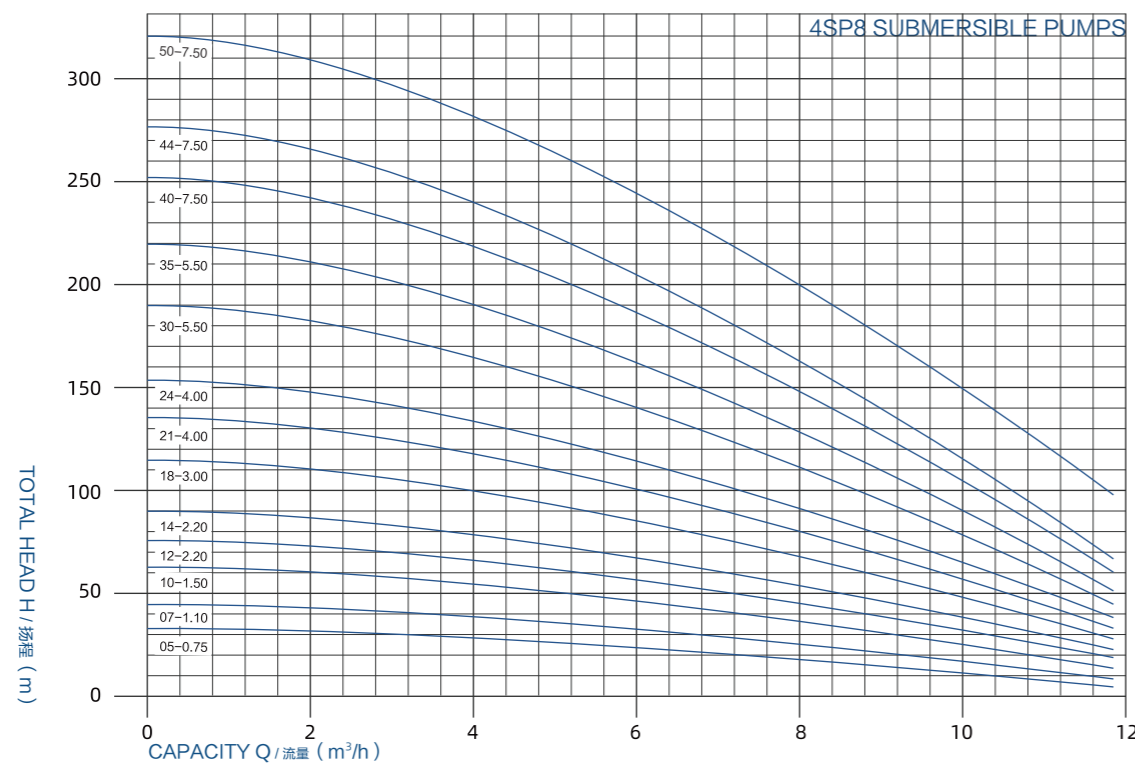

Professional manufacture of stainless steel pumps

# 4SP14

# 4"


## STAINLESS STEEL SUBMERSIBLE PUMPS

► Applications Environment :

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class: E  
绝缘等级: E
- Protection grade: IP 68  
保护等级: IP 68
- Maximum diameter Φ95mm  
最大直径 φ95毫米
- Highest temperature of liquid: 35°C  
液体的最高温度: 35 °c

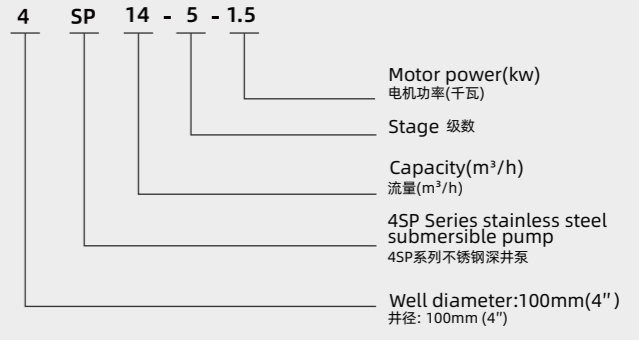


Diffuser Height (导叶壳高度) : 42mm

► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2"

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
	KW	Hp	l/min m³/h	0	133	223	267	Length mm	Weight kg
50Hz			Head 扬程 (m)	0	8	14	16		
4SP14-5	1.5	2		35	29	20	16	360	3.4
4SP14-7	2.2	3		49	40	28	23	444	4.3
4SP14-10	3	4		70	57	40	32	570	5.5
4SP14-13	4	5.5		91	74	52	42	696	6.8
4SP14-15	5.5	7.5		105	85	60	48	780	7.7
4SP14-18	5.5	7.5		126	103	72	58	903	9.0
4SP14-21	7.5	10		147	119	84	67	1032	10.3
4SP14-25	7.5	10		175	143	100	80	1200	12.0

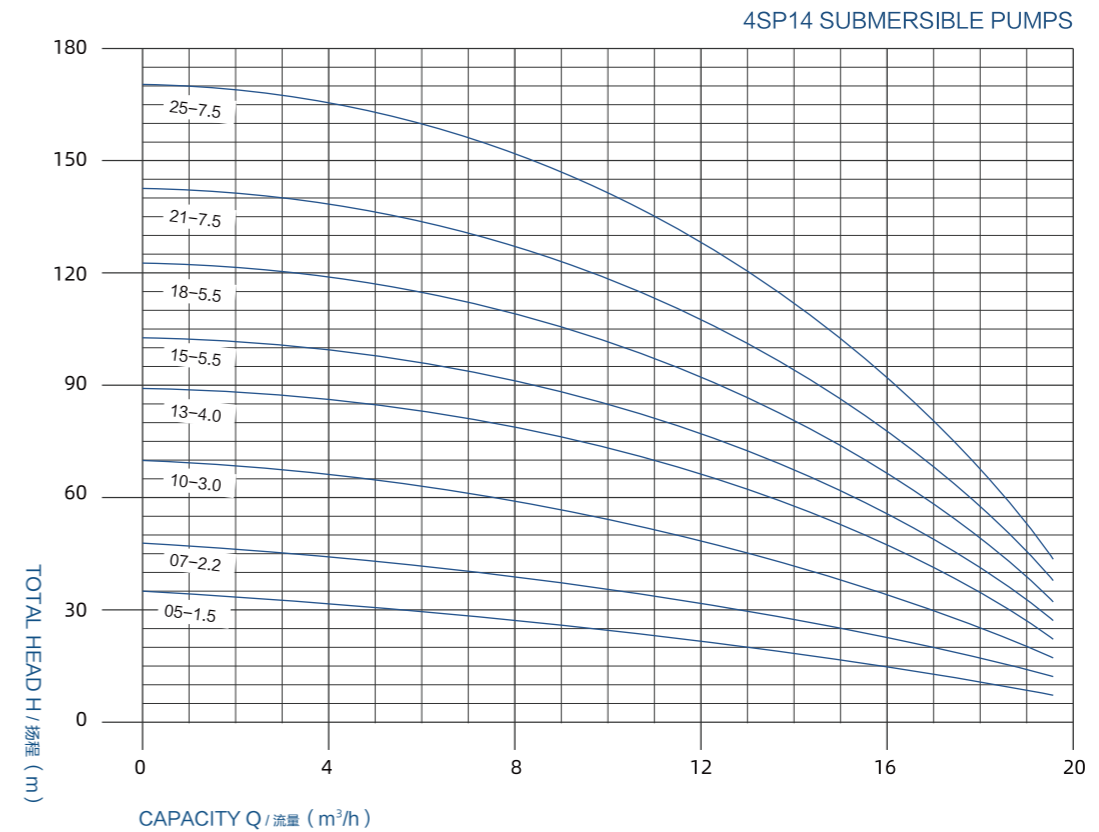

# 4"

## 4SP14 NEW

Professional manufacture of stainless steel pumps



### STAINLESS STEEL SUBMERSIBLE PUMPS




► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class: E  
绝缘等级: E
- Protection grade: IP 68  
保护等级: IP 68
- Maximum diameter Φ95mm  
最大直径 φ95毫米
- Highest temperature of liquid: 35°C  
液体的最高温度: 35 °c

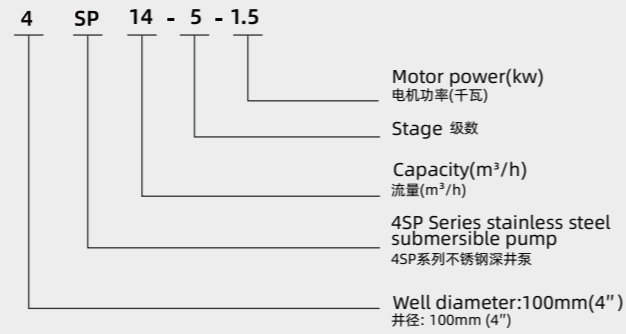


Diffuser Height (导叶壳高度) : 50mm

► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
	KW	Hp	l/min m³/h	0	83	166	233	266	300	Length mm
50Hz										
4SP14-5	1.5	2	34	31	26	22	18	13	400	
4SP14-7	2.2	3	47	44	37	31	25	18	500	
4SP14-10	3	4	68	62	53	44	36	26	650	
4SP14-13	4	5.5	88	81	69	57	47	34	800	
4SP14-15	5.5	7.5	102	94	80	66	54	39	900	
4SP14-18	5.5	7.5	122	113	96	79	65	47	1050	
4SP14-21	7.5	10	147	131	112	93	76	55	1200	
4SP14-25	7.5	10	170	157	133	110	90	65	1400	

4SP14 SUBMERSIBLE PUMPS

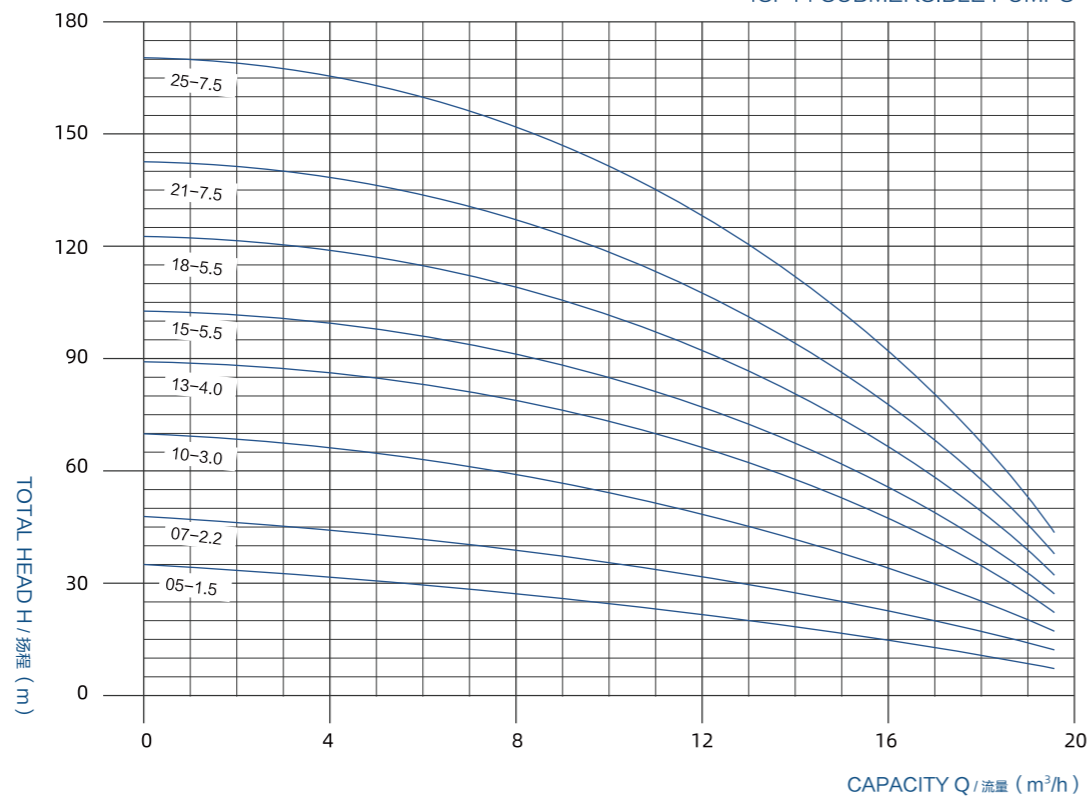

Professional manufacture of stainless steel pumps

# 5SP8

# 5"


### STAINLESS STEEL SUBMERSIBLE PUMPS

► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class: E  
绝缘等级: E
- Protection grade: IP 68  
保护等级: IP 68
- Maximum diameter Φ125mm  
最大直径 φ125毫米
- Highest temperature of liquid: 35°C  
液体的最高温度: 35 °c

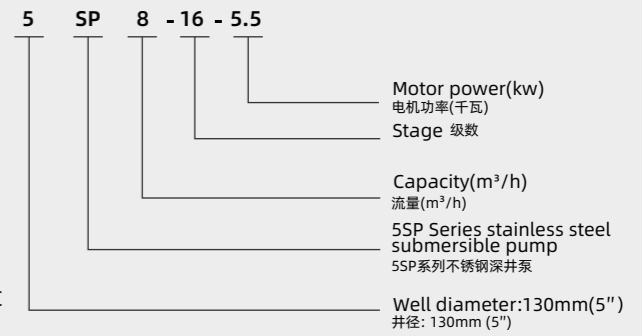


► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2"

Diffuser Height (导叶壳高度) : 40mm

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
	KW	Hp	l/min m³/h	0	83	100	133	166	200
50Hz									
5SP8-2	0.75	1	21	19	18	16	15	12	
5SP8-3	1.1	1.5	32	28	27	25	22	18	
5SP8-4	1.5	2	43	37	36	33	30	24	
5SP8-6	2.2	3	64	56	54	50	44	36	
5SP8-9	3	4	96	83	81	75	66	54	
5SP8-12	4	5.5	128	111	108	100	88	72	
5SP8-16	5.5	7.5	170	148	144	133	118	96	
5SP8-23	7.5	10	245	212	206	191	170	137	
5SP8-27	9.2	12.5	287	249	242	224	199	161	
5SP8-33	11	15	350	304	295	274	243	197	
5SP8-39	13	17.5	414	359	350	324	287	233	
5SP8-45	15	20	478	415	402	373	331	268	

5SP8 SUBMERSIBLE PUMPS

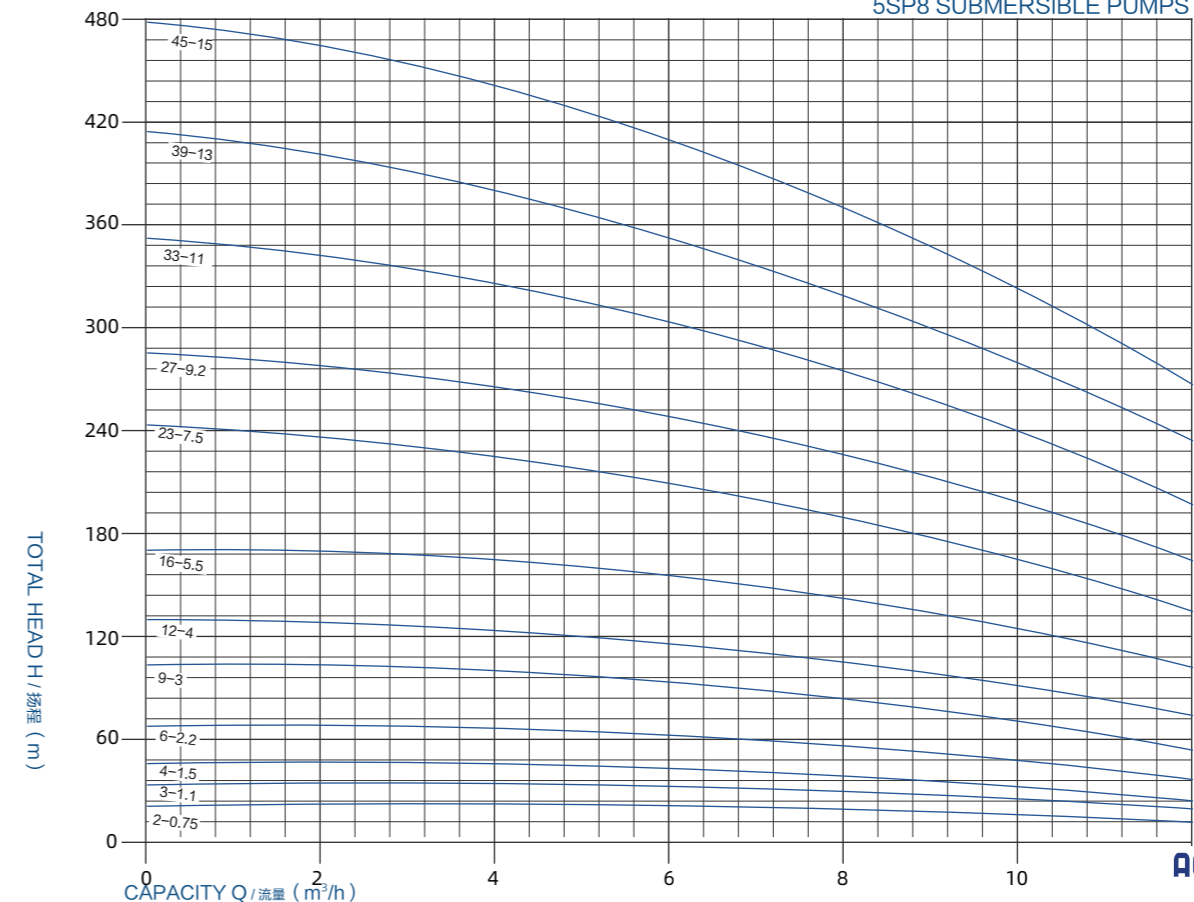

# 5"

# 5SP10

Professional manufacture of stainless steel pumps




## STAINLESS STEEL SUBMERSIBLE PUMPS

► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 系/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class: E  
绝缘等级: E
- Protection grade: IP 68  
保护等级: IP 68
- Maximum diameter  $\Phi$ 125mm  
最大直径  $\Phi$ 125毫米
- Highest temperature of liquid: 35°C  
液体的最高温度: 35 °c

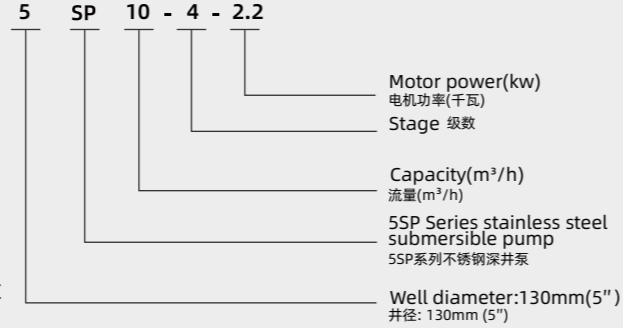

Diffuser Height  
(导叶壳高度)  
47mm




► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
			l/min m <sup>3</sup> /h	0	83	133	167	200	250	333
50Hz	KW	Hp	Head 扬程 (m)	0	5	8	10	12	15	20
5SP10-1	0.55	0.75	11	10	9	8.5	8	7	4	
5SP10-2	1.1	1.5	21	20	19	18	16	15	9	
5SP10-3	1.5	2	32	29	28	26	25	21	13	
5SP10-4	2.2	3	43	39	37	35	33	28	17	
5SP10-6	3	4	64	58	55	53	49	43	26	
5SP10-8	4	5.5	85	78	74	70	65	57	35	
5SP10-11	5.5	7.5	116	107	101	96	90	80	48	
5SP10-15	7.5	10	159	145	138	131	122	109	65	
5SP10-18	9.2	12.5	190	175	166	157	148	130	78	
5SP10-22	11	15	232	213	202	192	180	159	95	
5SP10-26	13	17.5	275	252	239	226	213	188	112	
5SP10-30	15	20	317	290	276	261	244	217	130	
5SP10-37	18.5	25	391	358	340	322	300	267	160	

5SP10 SUBMERSIBLE PUMPS

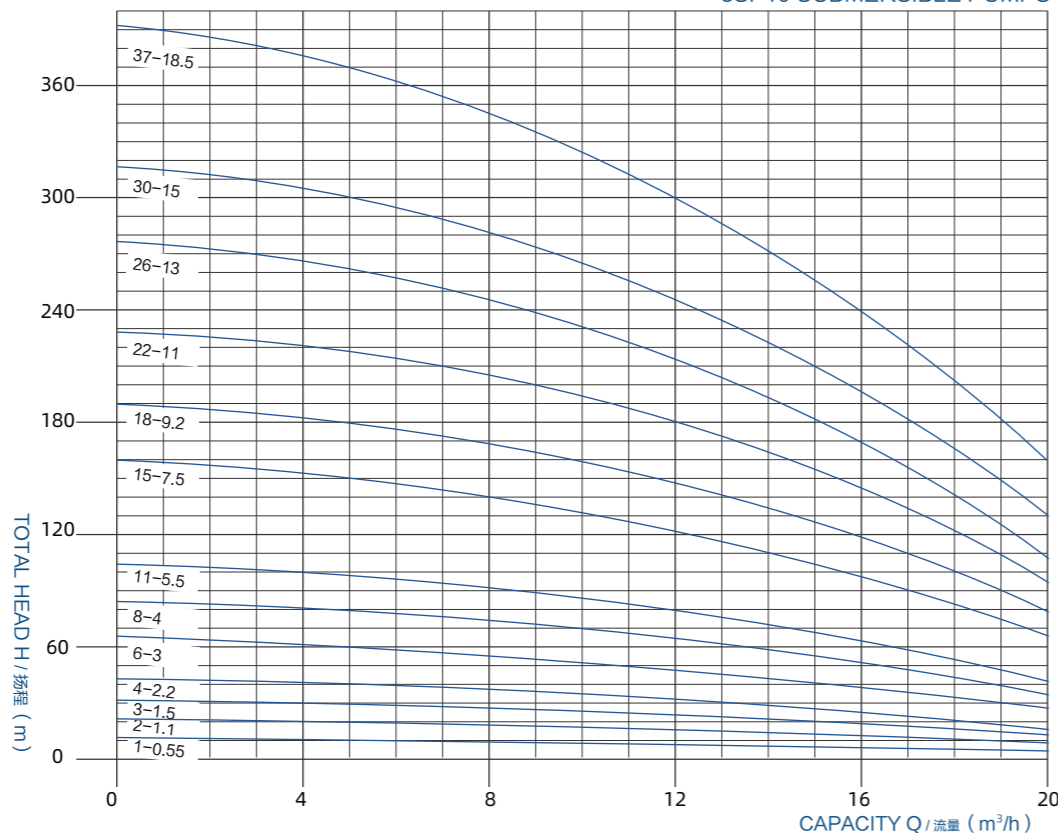

Professional manufacture of stainless steel pumps

# 5SP15

# 5"


## STAINLESS STEEL SUBMERSIBLE PUMPS

► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 系/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class: E  
绝缘等级: E
- Protection grade: IP 68  
保护等级: IP 68
- Maximum diameter  $\Phi$ 125mm  
最大直径  $\Phi$ 125毫米
- Highest temperature of liquid: 35°C  
液体的最高温度: 35 °c

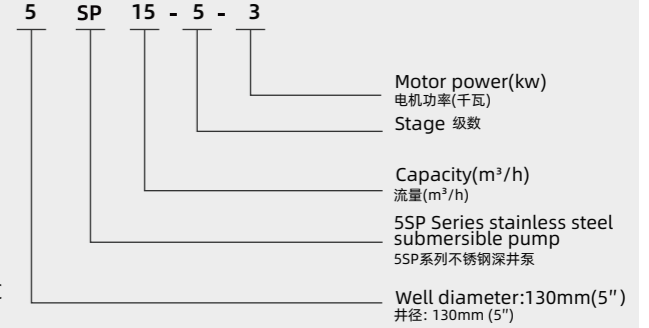


► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
			l/min m <sup>3</sup> /h	0	167	200	250	283	333	400
50Hz	KW	Hp	Head 扬程 (m)	0	10	12	15	17	20	24
5SP15-1	0.55	0.75	11	9	8.5	8	7	6	3	
5SP15-2	1.1	1.5	21	18	17	16	14	11	5	
5SP15-3	2.2	3	32	28	26	24	22	16	7	
5SP15-5	3	4	54	46	44	40	36	27	12	
5SP15-7	4	5.5	75	64	61	55	50	38	17	
5SP15-9	5.5	7.5	96	82	78	71	64	49	22	
5SP15-13	7.5	10	139	119	113	103	93	71	31	
5SP15-16	9.2	12.5	171	146	139	126	114	87	38	
5SP15-19	11	15	203	173	165	150	136	103	45	
5SP15-22	13	17.5	235	201	191	174	157	120	52	
5SP15-25	15	20	267	228	217	198	178	136	59	
5SP15-30	18.5	25	321	274	260	237	214	163	71	

5SP15 SUBMERSIBLE PUMPS

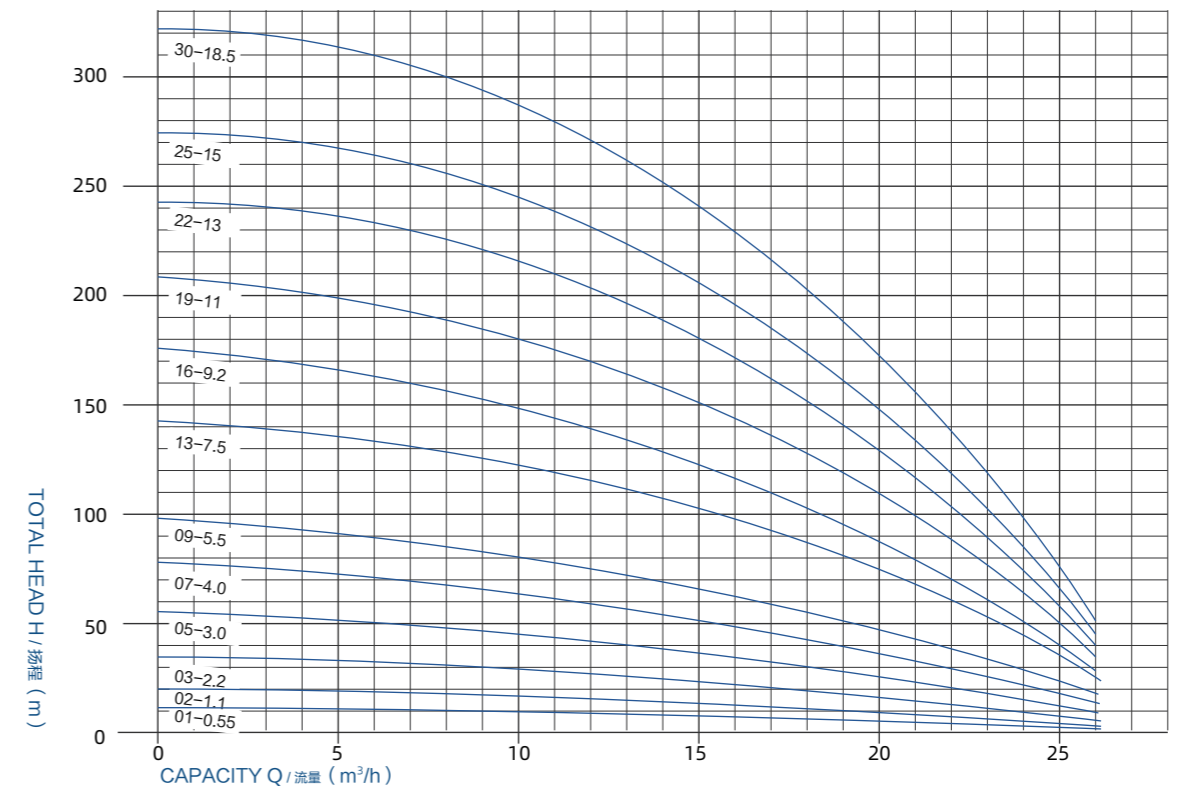

Diffuser Height  
(导叶壳高度)  
47mm



# 5"

# 5SP20

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ125mm  
最大直径 φ125毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

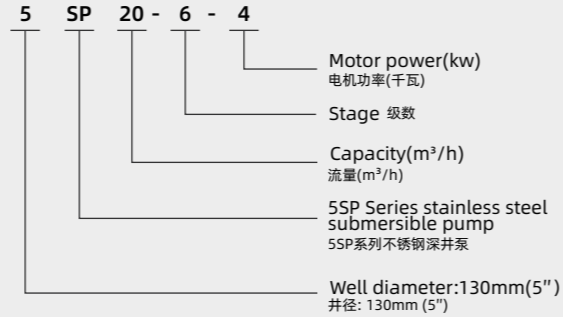


Diffuser Height (导叶壳高度) 48mm

► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2"

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
	KW	Hp	l/min m³/h	0	167	250	333	416	500
5SP20-1	0.75	1	11	10	9	7	5	2	
5SP20-2	1.5	2	22	19	18	15	10	4	
5SP20-3	2.2	3	33	28	26	22	15	6	
5SP20-4	3	4	44	37	34	29	20	8	
5SP20-6	4	5.5	66	56	52	44	30	12	
5SP20-8	5.5	7.5	88	75	70	58	40	16	
5SP20-11	7.5	10	121	103	96	80	56	22	
5SP20-13	9.2	12.5	143	122	113	95	65	26	
5SP20-16	11	15	176	150	140	117	81	33	
5SP20-19	13	17.5	209	178	166	138	96	39	
5SP20-22	15	20	242	206	192	160	111	45	
5SP20-27	18.5	25	297	254	236	197	136	55	

5SP20 SUBMERSIBLE PUMPS

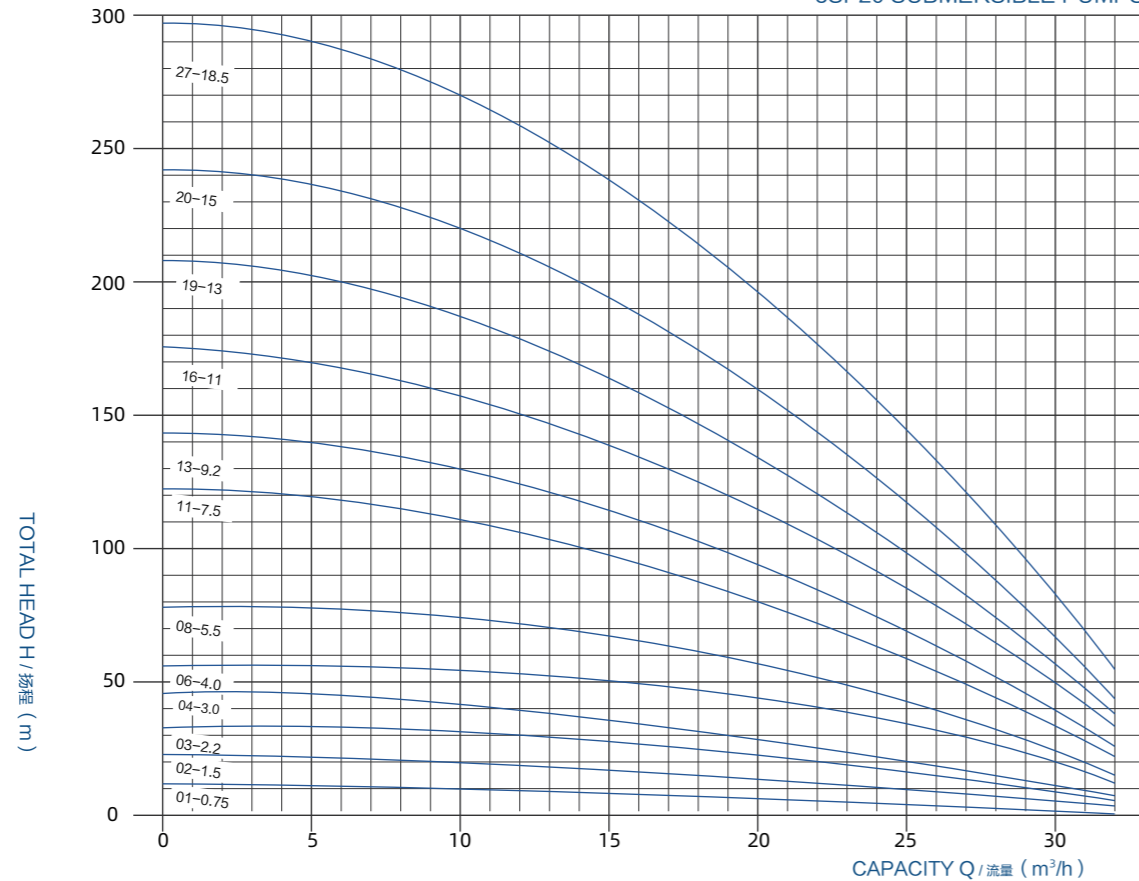

# 5SP25

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




# 5"

► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ125mm  
最大直径 φ125毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

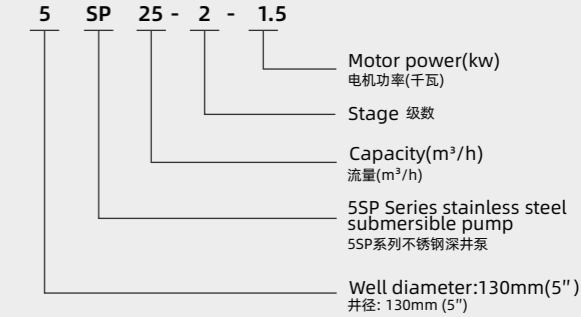


► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2"

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
	KW	Hp	l/min m³/h	0	250	333	416	500	583
5SP25-1	0.75	1	11	9	8	7	6	4	
5SP25-2	1.5	2	22	19	17	15	11	8	
5SP25-3	2.2	3	33	28	26	22	17	12	
5SP25-4	3	4	44	37	34	29	23	16	
5SP25-5	4	5.5	55	46	44	36	29	20	
5SP25-7	5.5	7.5	77	65	60	51	40	28	
5SP25-10	7.5	10	110	93	85	73	58	40	
5SP25-12	9.2	12.5	132	111	102	87	69	48	
5SP25-14	11	15	154	130	119	101	81	56	
5SP25-17	13	17.5	187	157	145	123	98	68	
5SP25-20	15	20	220	186	170	145	115	80	
5SP25-24	18.5	25	264	211	204	174	138	97	

5SP25 SUBMERSIBLE PUMPS

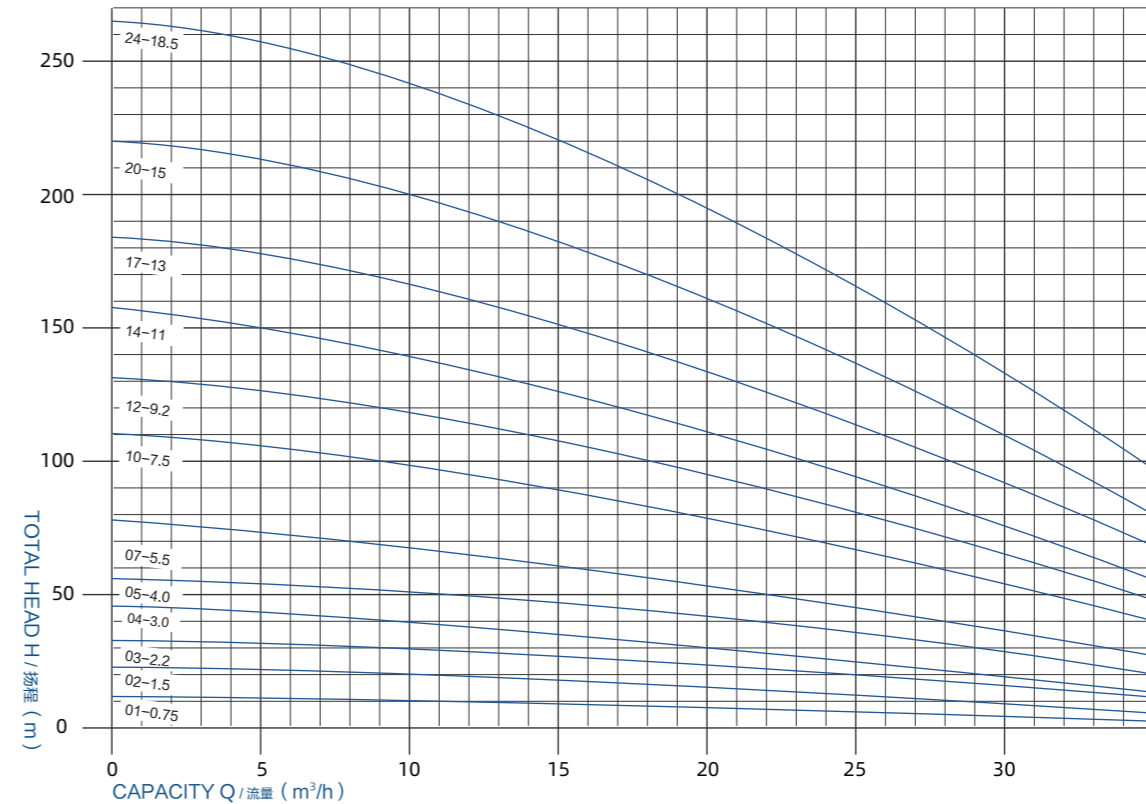

Diffuser Height (导叶壳高度) 56mm



# 5"

# 5SP30

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




### Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

### Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter  $\Phi$ 125mm  
最大直径  $\Phi$ 125毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

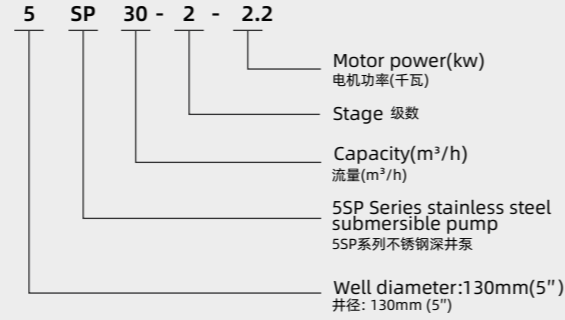


Diffuser Height (导叶壳高度) 56mm

### PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2"

Type/型号	Motor power 功率		Capacity and head / 流量和扬程						
			l/min	0	333	416	500	583	666
50Hz	KW	Hp	m <sup>3</sup> /h	0	20	25	30	35	40
5SP30-1	1.1	1.5	11	9	8	7	5	3	
5SP30-2	2.2	3	22	18	16	14	10	5	
5SP30-3	3	4	34	28	24	21	16	8	
5SP30-4	4	5.5	45	37	32	28	21	10	
5SP30-6	5.5	7.5	68	55	48	41	30	15	
5SP30-8	7.5	10	91	74	64	54	41	20	
5SP30-10	9.2	12.5	114	93	80	69	50	25	
5SP30-12	11	15	136	111	96	82	62	30	
5SP30-14	13	17.5	160	129	112	95	72	35	
5SP30-16	15	20	182	148	128	108	82	40	
5SP30-20	18.5	25	227	185	160	136	103	50	

5SP30 SUBMERSIBLE PUMPS

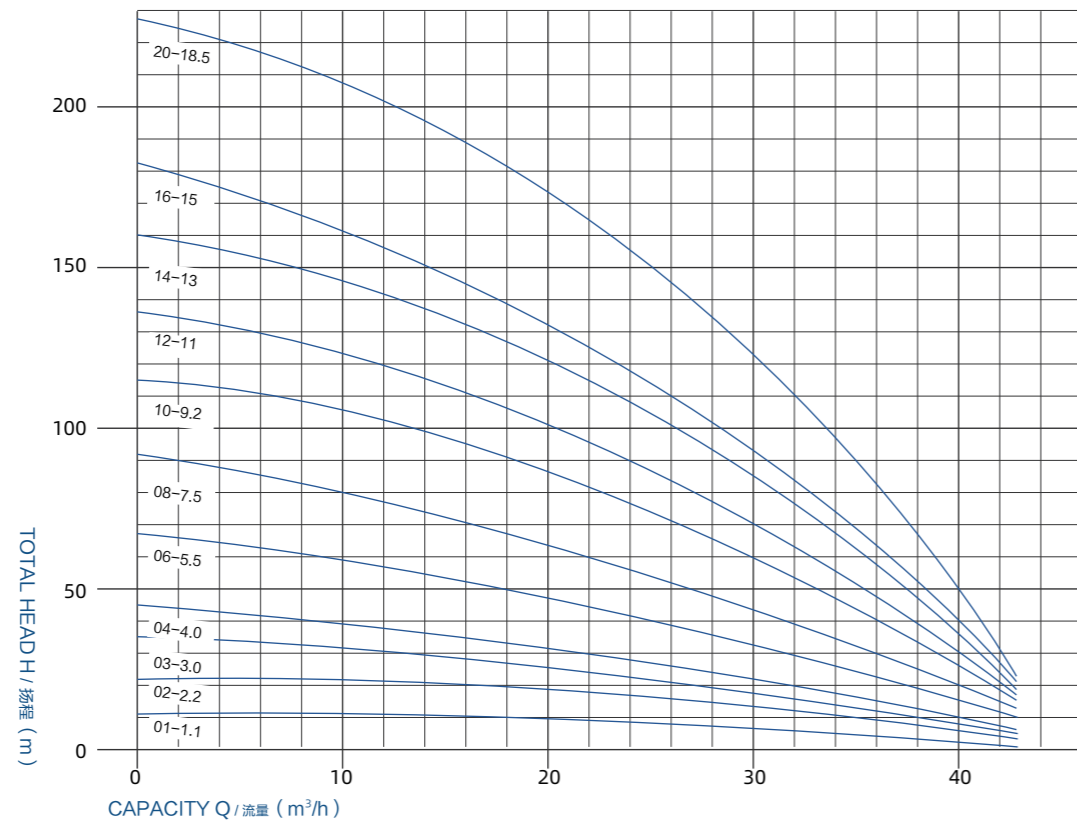

# 6SP17

Professional manufacture of stainless steel pumps




## STAINLESS STEEL SUBMERSIBLE PUMPS

### Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

### Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter  $\Phi$ 135mm  
最大直径  $\Phi$ 135毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

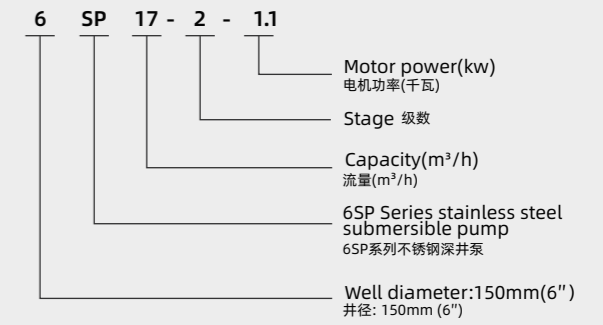


### PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2" ~ G3"

Type/型号	Motor power 功率		Capacity and head / 流量和扬程							
			l/min	0	166	250	283	333	416	Length
50Hz	KW	Hp	m <sup>3</sup> /h	0	10	15	17	20	25	mm
6SP17-1	0.55	0.75	11	10	9	8	7	4	292	
6SP17-2	1.1	1.5	22	20	17	16	13	8	337	
6SP17-3	2.2	3	33	29	26	24	20	12	382	
6SP17-5	3	4	55	49	44	40	33	20	472	
6SP17-7	4	5.5	77	68	60	56	47	28	562	
6SP17-9	5.5	7.5	99	86	78	72	60	36	676	
6SP17-13	7.5	10	142	123	112	104	86	51	856	
6SP17-16	9.2	12.5	175	152	137	128	106	64	991	
6SP17-19	11	15	205	180	163	152	126	76	1126	
6SP17-22	13	17.5	238	210	188	175	147	87	1261	
6SP17-26	15	20	280	248	222	208	172	102	1441	
6SP17-32	18.5	25	345	303	275	255	212	127	1711	
6SP17-38	22	30	410	360	325	303	252	150	1981	
6SP17-43	26	35	465	408	370	340	285	170	2206	
6SP17-50	30	40	540	475	430	400	330	198	2521	

6SP17 SUBMERSIBLE PUMPS

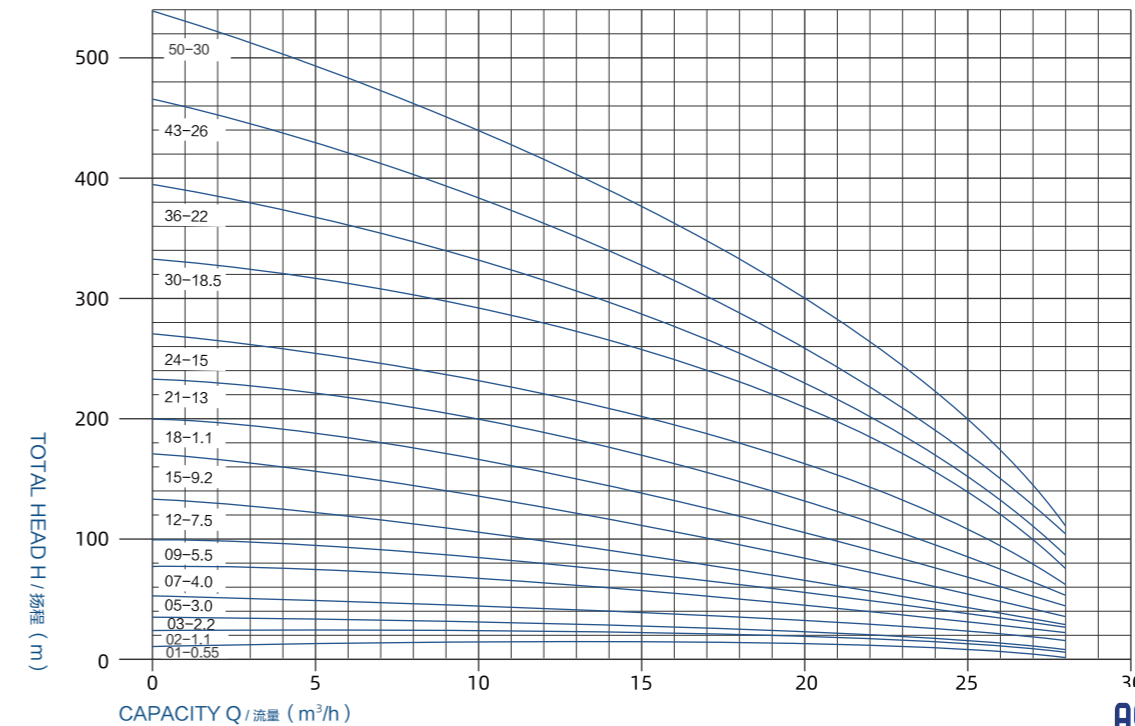

Diffuser Height (导叶壳高度) 45mm



# 6"

# 6SP20

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ135mm  
最大直径 φ135毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

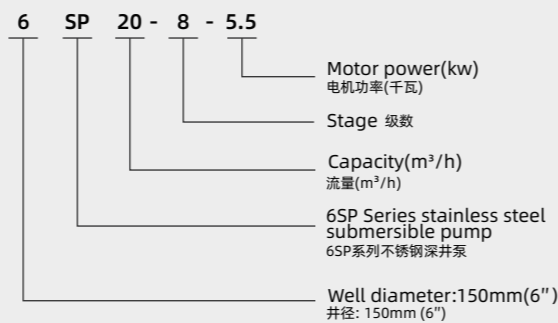


Diffuser Height (导叶壳高度) 45mm



► PERFORMANCE TABLE / 性能表: rpm / 转速: 2850 Outlet / 出水口: G2 1/2" ~ G3"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
			l/min	0	166	250	283	333	416	Length
50Hz	KW	Hp	m³/h	0	10	15	17	20	25	mm
6SP20-2	1.5	2	23	20	19	18	16	12	337	
6SP20-3	2.2	3	35	30	29	27	24	18	382	
6SP20-4	3	4	46	40	38	36	32	24	427	
6SP20-6	4	5.5	69	60	57	54	48	36	517	
6SP20-8	5.5	7.5	92	80	75	72	65	48	631	
6SP20-11	7.5	10	127	110	103	99	90	66	766	
6SP20-13	9.2	12.5	150	130	122	117	105	78	856	
6SP20-16	11	15	185	160	150	145	130	96	991	
6SP20-19	13	17.5	219	190	178	171	154	114	1126	
6SP20-22	15	20	253	220	206	198	178	132	1261	
6SP20-27	18.5	25	310	270	253	245	219	162	1486	
6SP20-32	22	30	368	320	300	290	260	192	1711	
6SP20-38	26	35	426	370	346	335	300	222	1936	
6SP20-43	30	40	495	430	402	388	350	258	2206	
6SP20-52	37	50	600	520	488	470	421	312	2611	

6SP20 SUBMERSIBLE PUMPS

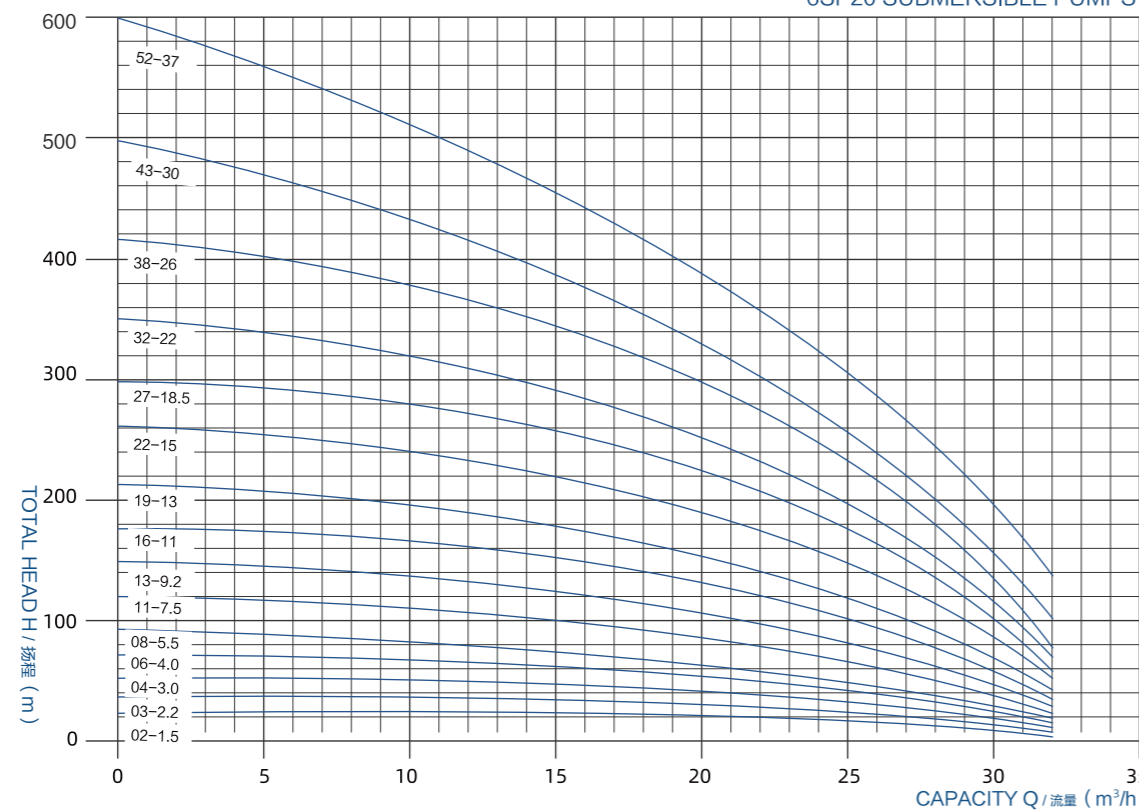

Professional manufacture of stainless steel pumps

# 6SP22

# 6"


## STAINLESS STEEL SUBMERSIBLE PUMPS

► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达


- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ140mm  
最大直径 φ140毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

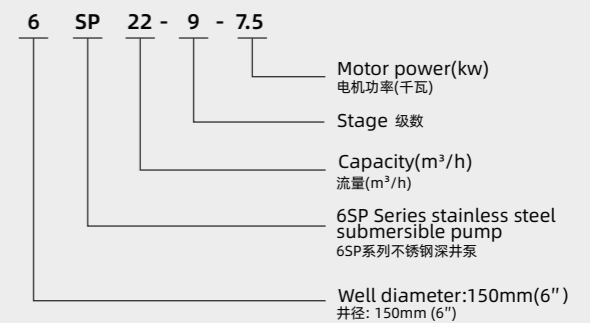

► PERFORMANCE TABLE / 性能表: rpm / 转速: 2850 Outlet / 出水口: G3"

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
			l/min	0	166	250	283	333	416
50Hz	KW	Hp	m³/h	0	10	15	17	20	25
6SP22-4	4	5.5	58	53	50	48	44	33	
6SP22-6	5.5	7.5	86	80	75	72	65	49	
6SP22-9	7.5	10	129	119	112	108	99	74	
6SP22-11	9.2	12.5	158	146	137	132	120	90	
6SP22-13	11	15	186	172	162	155	142	106	
6SP22-15	13	17.5	215	198	187	180	165	122	
6SP22-18	15	20	258	238	225	215	197	147	
6SP22-22	18.5	25	315	290	274	263	240	180	
6SP22-26	22	30	372	343	324	310	285	212	
6SP22-30	26	35	430	396	374	360	330	245	
6SP22-36	30	40	515	475	449	430	393	293	
6SP22-40	37	50	572	528	500	480	437	325	
6SP22-44	37	50	630	580	550	525	480	360	
6SP22-48	45	60	688	635	600	575	525	390	
6SP22-53	45	60	760	700	660	635	580	431	

6SP22 SUBMERSIBLE PUMPS

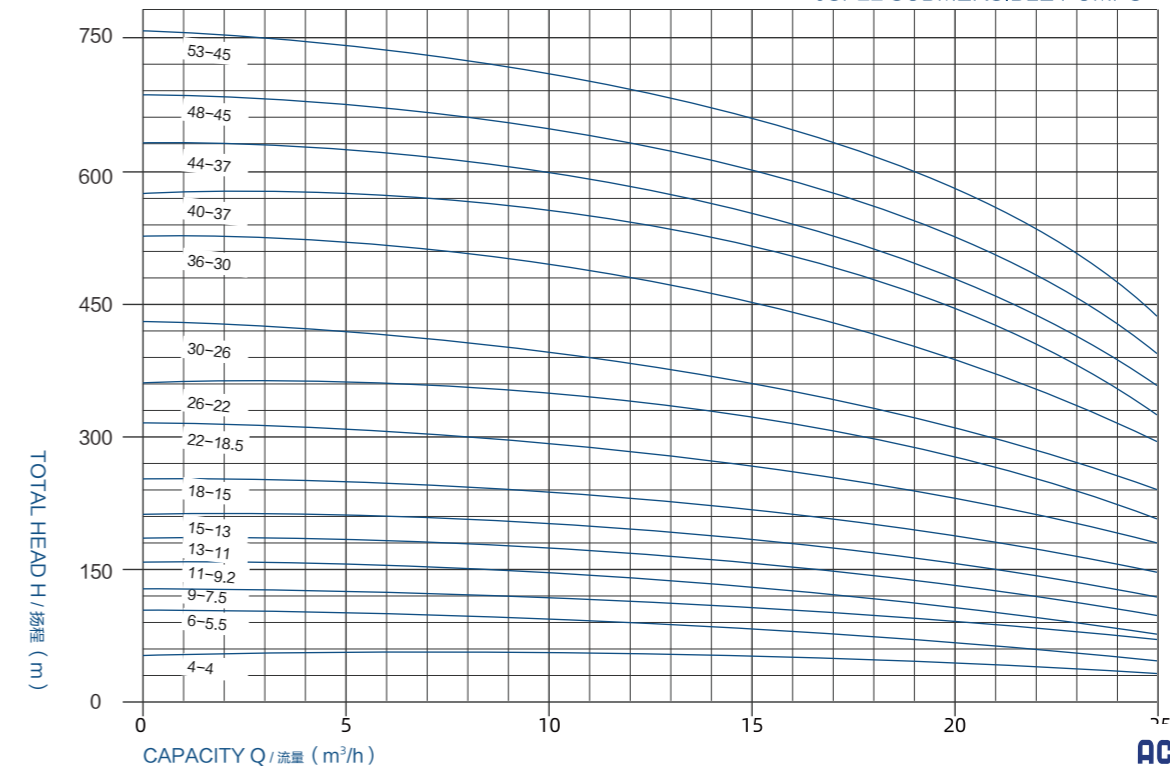

Diffuser Height (导叶壳高度) 45mm



# 6"

# 6SP30

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ138mm  
最大直径 φ138毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

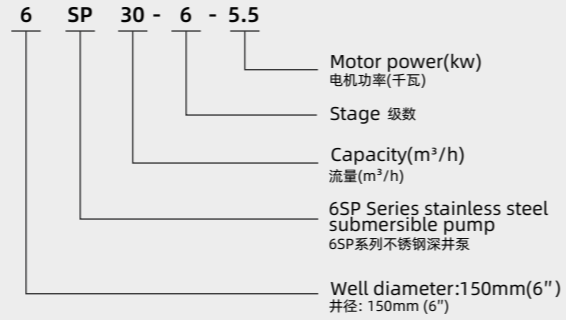


Diffuser Height (导叶壳高度) 56.5mm

► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2" ~ G3"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
	KW	Hp	l/min m³/h	0	333	416	500	583	666	Length mm
50Hz										
6SP30-1	1.1	1.5	13	10	9	8	6	4	304	
6SP30-2	2.2	3	26	20	18	15	12	8	360	
6SP30-3	3	4	39	30	27	23	18	11	417	
6SP30-4	4	5.5	52	40	36	30	23	15	473	
6SP30-6	5.5	7.5	77	59	54	46	35	23	610	
6SP30-8	7.5	10	103	79	71	61	46	30	723	
6SP30-10	9.2	12.5	129	99	89	76	58	38	836	
6SP30-12	11	15	154	118	107	91	69	45	949	
6SP30-14	13	17.5	180	138	125	106	81	53	1062	
6SP30-16	15	20	205	158	143	122	92	61	1175	
6SP30-19	18.5	25	244	187	170	144	110	72	1345	
6SP30-23	22	30	295	226	205	175	132	87	1571	
6SP30-27	26	35	347	265	240	205	155	102	1797	
6SP30-31	30	40	398	305	276	235	178	118	2023	
6SP30-39	37	50	500	385	348	296	224	148	2475	
6Sp30-46	45	60	590	452	410	350	265	175	2870	

6SP30 SUBMERSIBLE PUMPS

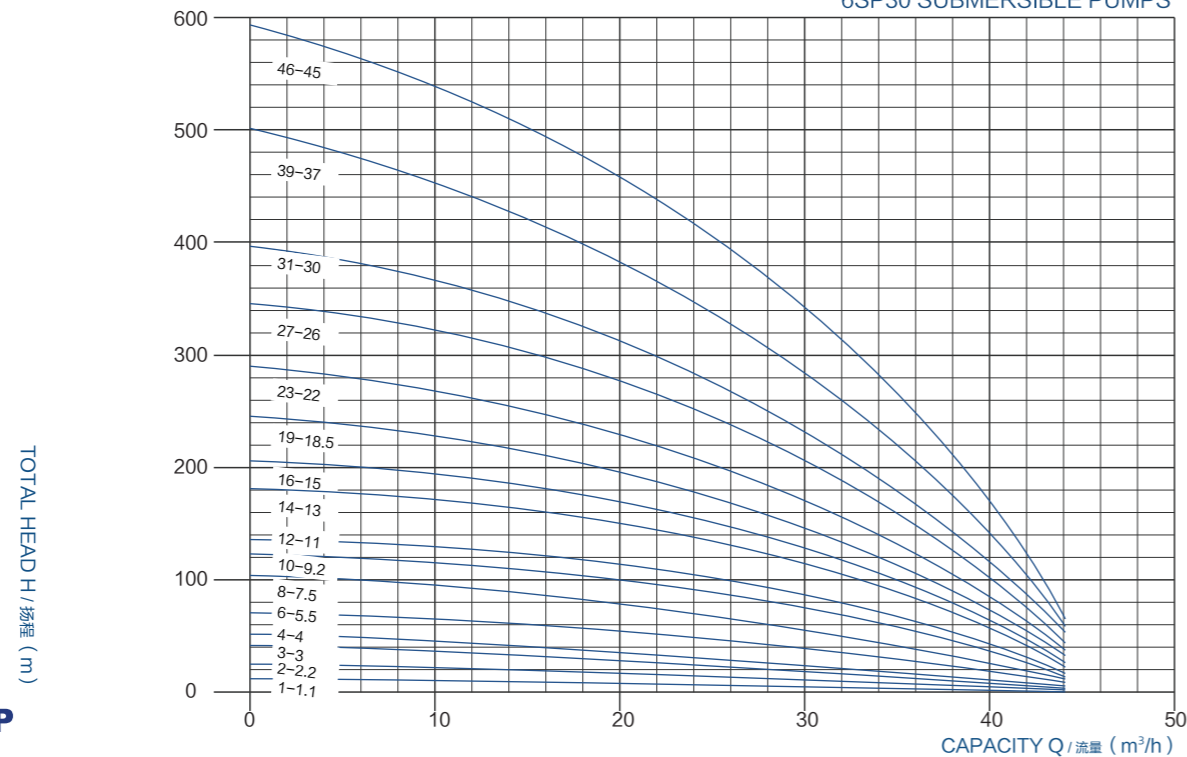

# 6SP30

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ138mm  
最大直径 φ138毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

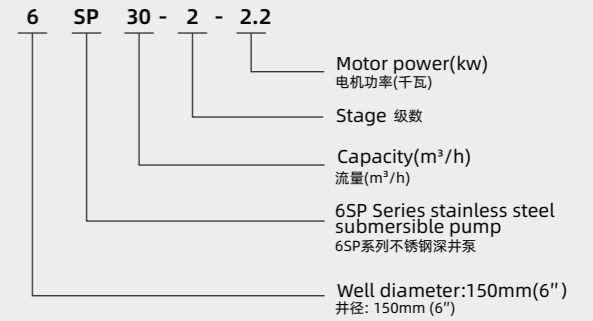


► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G2 1/2" ~ G3"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
	KW	Hp	l/min m³/h	0	333	416	500	583	666	Length mm
50Hz										
6SP30-1	1.1	1.5	11	10	9	8	7	6	343	
6SP30-2	2.2	3	22	20	18	16	14	11	439	
6SP30-3	3	4	33	29	27	24	21	17	535	
6SP30-4	4	5.5	44	38	36	32	28	22	631	
6SP30-6	5.5	7.5	65	58	54	49	42	34	847	
6SP30-8	7.5	10	86	77	71	65	57	45	1039	
6SP30-10	9.2	12.5	108	96	89	81	71	56	1231	
6SP30-12	11	15	130	115	107	98	85	68	1423	
6SP30-14	13	17.5	151	134	125	114	100	80	1615	
6SP30-16	15	20	172	153	143	130	114	91	1807	
6SP30-19	18.5	25	205	182	169	155	135	108	2095	
6SP30-23	22	30	248	220	205	187	163	130	2479	
6SP30-27	26	35	291	259	240	220	192	152	2863	
6SP30-31	30	40	335	297	276	252	220	176	3247	

6SP30 SUBMERSIBLE PUMPS

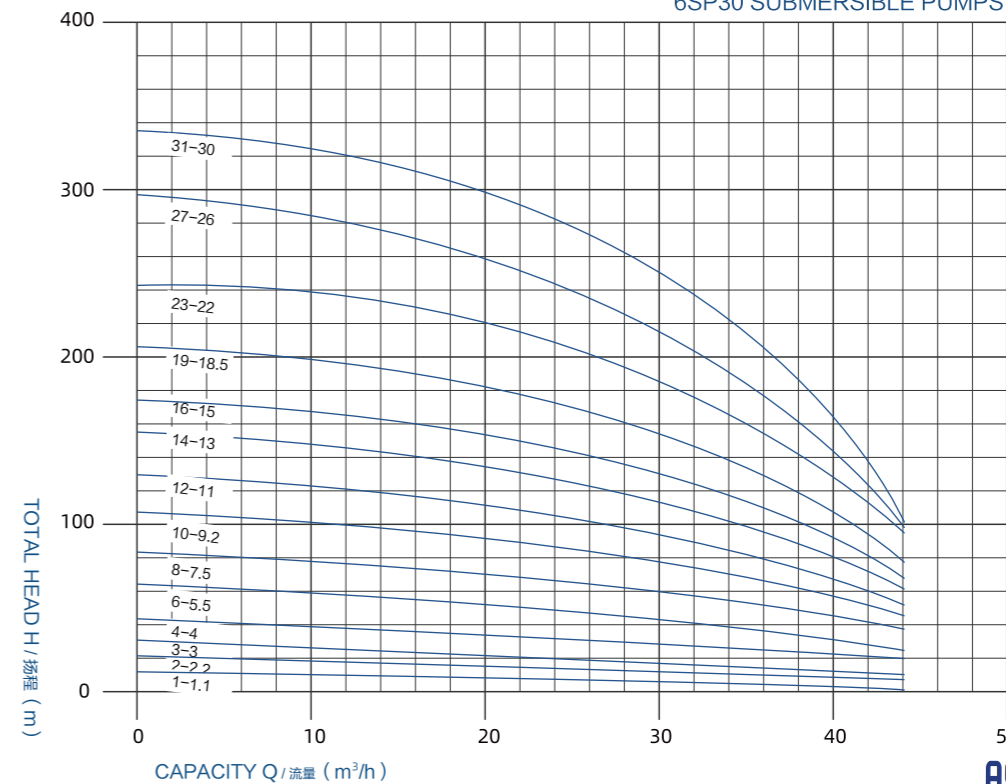

Diffuser Height (导叶壳高度) 96mm



# 6"

# 6SP32

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




**Applications Environment:**

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

**Pump/Motor 泵/马达**

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ140mm  
最大直径 φ140毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

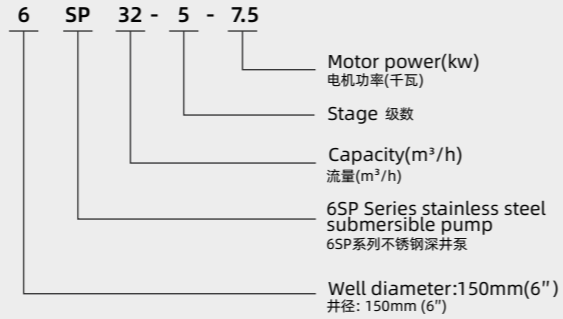


Diffuser Height (导叶壳高度) 53mm

**PERFORMANCE TABLE / 性能表:**

rpm / 转速: 2850 Outlet / 出水口: G3"

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
	KW	Hp	l/min	0	416	500	533	583	666
50Hz			m³/h	0	25	30	32	35	40
6SP32-5	7.5	10	76	64	59	56	51	40	
6SP32-6	9.2	12.5	91	77	70	67	61	47	
6SP32-7	11	15	106	90	82	79	72	55	
6SP32-8	13	17.5	122	103	94	90	82	63	
6SP32-10	15	20	152	128	117	112	102	79	
6SP32-12	18.5	25	183	154	141	135	123	95	
6SP32-14	22	30	213	180	164	157	143	110	
6SP32-16	26	35	243	205	188	180	164	126	
6SP32-20	30	40	304	256	235	224	204	158	
6SP32-25	37	50	380	320	293	280	255	198	
6SP32-30	45	60	456	384	351	336	306	237	

6SP32 SUBMERSIBLE PUMPS

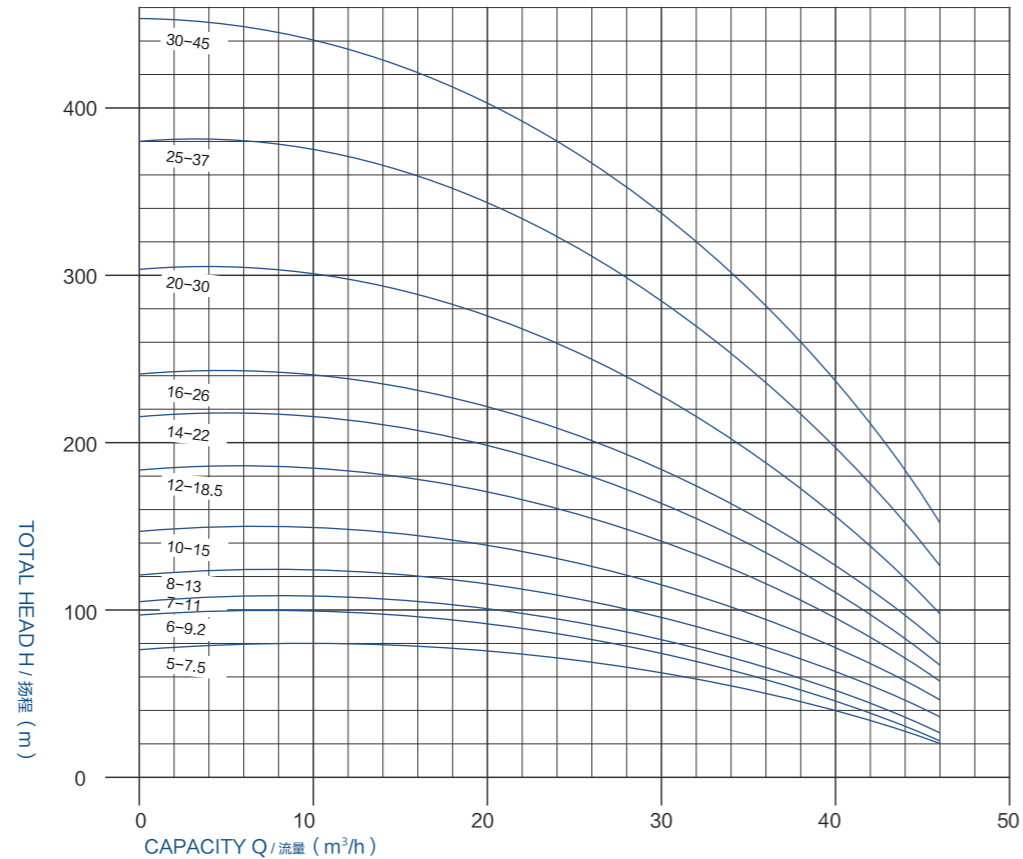

Professional manufacture of stainless steel pumps

# 6SP40

# 6"


## STAINLESS STEEL SUBMERSIBLE PUMPS

**Applications Environment:**

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

**Pump/Motor 泵/马达**

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ138mm  
最大直径 φ138毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

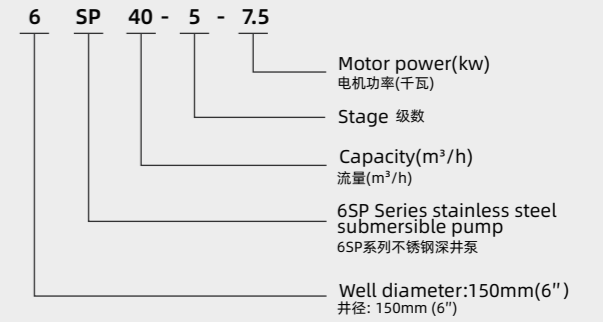


**PERFORMANCE TABLE / 性能表:**

rpm / 转速: 2850 Outlet / 出水口: G3" ~ G4"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
	KW	Hp	l/min	0	333	500	666	750	833	Length
50Hz			m³/h	0	20	30	40	45	50	mm
6SP40-1	1.5	2	13	12	10	9	8	7	329	
6SP40-2	3	4	26	25	21	18	16	13	411	
6SP40-3	5.5	7.5	40	37	32	27	25	20	517	
6SP40-4	7.5	10	53	50	43	36	32	28	599	
6SP40-5	7.5	10	67	63	54	46	41	35	681	
6SP40-6	9.2	12.5	80	74	65	55	49	42	763	
6SP40-7	11	15	94	88	75	64	57	50	845	
6SP40-8	13	17.5	107	100	86	73	65	56	927	
6SP40-10	15	20	134	124	107	91	82	70	1091	
6SP40-12	18.5	25	161	148	129	109	98	85	1255	
6SP40-14	22	30	188	173	151	127	115	99	1419	
6SP40-17	26	35	228	210	184	154	140	120	1665	
6SP40-20	30	40	268	247	216	181	164	142	1911	
6SP40-24	37	45	322	297	259	217	198	170	2239	
6SP40-30	45	60	403	370	322	270	248	212	2731	

6SP40 SUBMERSIBLE PUMPS

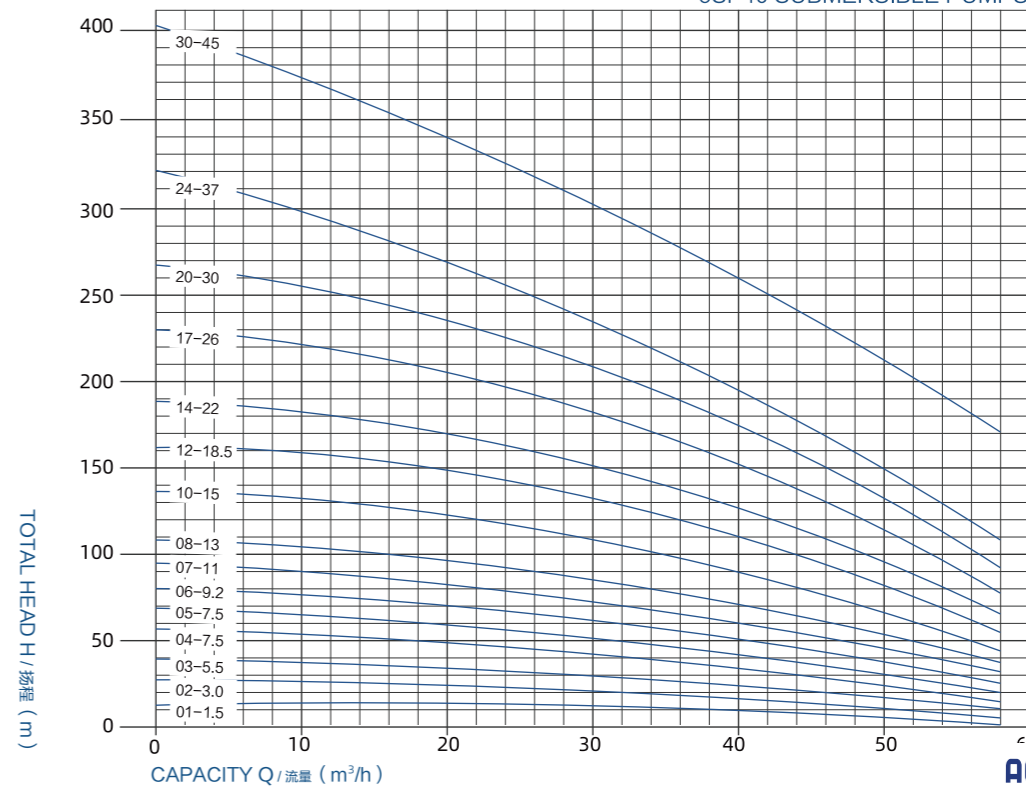

Diffuser Height (导叶壳高度) 82mm



# 6"

# 6SP46

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




**Applications Environment:**

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

**Pump/Motor 泵/马达**

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ140mm  
最大直径 φ140毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

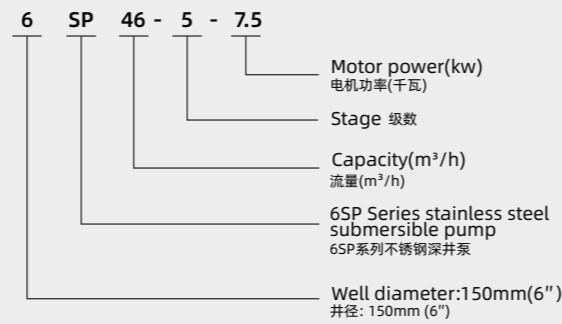


Diffuser Height (导叶壳高度) 113mm



**PERFORMANCE TABLE / 性能表:**

rpm / 转速: 2850 Outlet / 出水口: G3"~G4"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
			l/min	0	583	666	766	833	916	Length
50Hz	KW	Hp	m³/h	0	35	40	46	50	55	mm
6SP46-1	1.5	2	13	11	10	9	8	7	360	
6SP46-2	3	4	27	21	20	18	17	14	473	
6SP46-3	5.5	7.5	41	32	30	27	25	22	610	
6SP46-4	7.5	10	54	42	40	37	34	30	723	
6SP46-5	7.5	10	67	53	50	46	43	37	836	
6SP46-6	9.2	12.5	81	63	60	55	51	45	949	
6SP46-7	11	15	95	74	70	65	60	52	1062	
6SP46-8	13	17.5	108	85	80	74	68	60	1175	
6SP46-10	15	20	135	105	100	92	86	74	1401	
6SP46-12	18.5	25	162	127	120	111	103	90	1627	
6SP46-14	22	30	190	148	140	130	120	104	1853	
6SP46-16	26	35	216	169	160	148	137	119	2097	
6SP46-18	30	40	244	190	180	167	154	134	2305	
6SP46-20	30	40	270	211	200	185	172	149	2531	
6SP46-24	37	50	325	254	240	222	206	179	2983	
6SP46-30	45	60	406	318	300	278	258	225	3661	

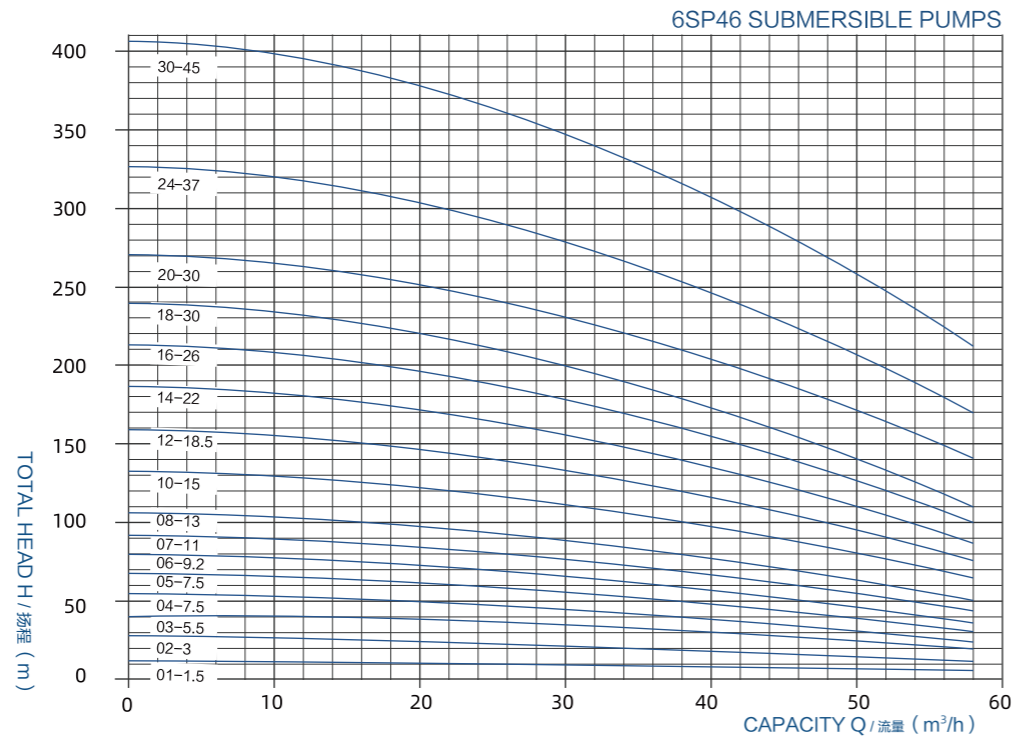

Professional manufacture of stainless steel pumps

# 6SP60

# 6"


## STAINLESS STEEL SUBMERSIBLE PUMPS

**Applications Environment:**

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

**Pump/Motor 泵/马达**

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ140mm  
最大直径 φ140毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

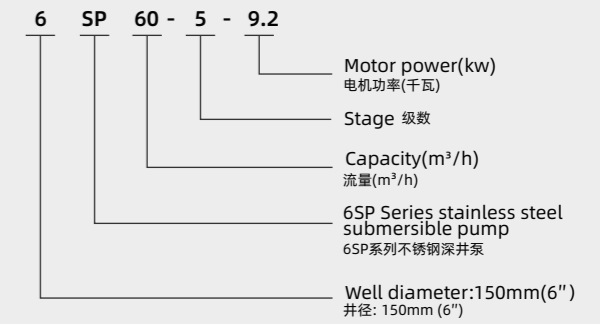


**PERFORMANCE TABLE / 性能表:**

rpm / 转速: 2850 Outlet / 出水口: G3"~G4"

Type/型号	Motor power 功率		Capacity and head/流量和扬程								
			l/min	0	666	833	916	1000	1083	1166	Length
50Hz	KW	Hp	m³/h	0	40	50	55	60	65	70	mm
6SP60-1	2.2	3	13	10	9	9	8	7	6	360	
6SP60-2	4	5.5	26	20	19	18	16	15	12	473	
6SP60-3	5.5	7.5	39	30	28	27	25	22	19	610	
6SP60-4	7.5	10	52	40	38	36	34	30	25	723	
6SP60-5	9.2	12.5	65	50	47	45	42	37	32	836	
6SP60-6	11	15	78	60	56	54	50	45	38	949	
6SP60-8	15	20	104	81	75	72	67	60	51	1175	
6SP60-9	18.5	25	117	91	85	81	75	68	58	1288	
6SP60-10	18.5	25	130	101	94	90	83	75	64	1401	
6SP60-11	22	30	143	111	103	99	92	82	70	1514	
6SP60-12	22	30	156	121	113	108	100	90	77	1627	
6SP60-13	26	35	169	131	121	117	108	98	84	1740	
6SP60-14	26	35	182	141	131	126	117	105	90	1853	
6SP60-15	30	40	194	151	140	135	125	113	97	1966	
6SP60-16	30	40	208	162	150	144	134	120	103	2079	
6SP60-18	37	50	233	181	169	162	150	135	116	2305	
6SP60-20	37	50	260	201	188	180	167	150	128	2531	
6SP60-24	45	60	310	242	225	216	200	180	155	2983	

Diffuser Height (导叶壳高度) 113mm

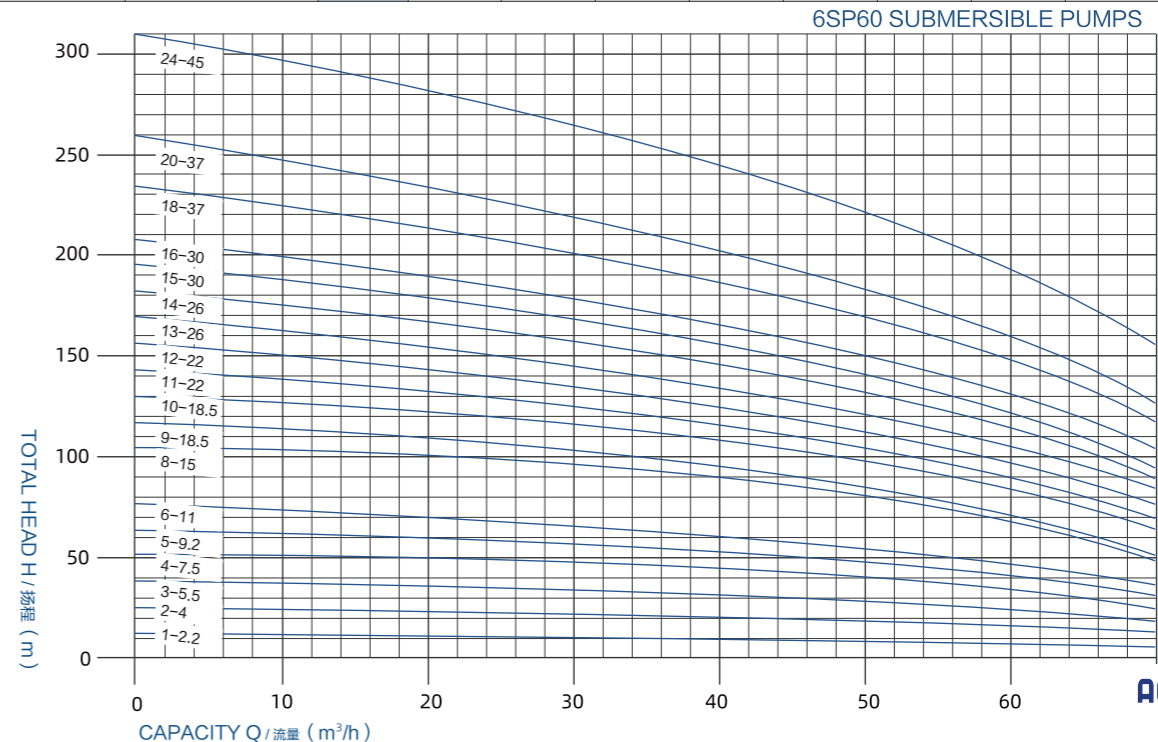

# 8"

# 8SP77

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ185mm  
最大直径 φ185毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

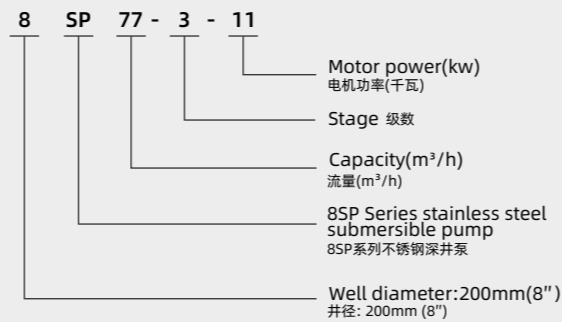


Diffuser Height (导叶壳高度)  
128/104mm



► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G4"~ G5"

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
	KW	Hp	l/min	0	833	1000	1166	1283	1500
50Hz			m³/h	0	50	60	70	77	90
8SP77-1	4	5.5	20	15	14	13	12	10	
8SP77-2	7.5	10	40	30	28	26	25	21	
8SP77-3	11	15	59	45	42	40	37	31	
8SP77-4	15	20	79	60	56	53	50	42	
8SP77-5	18.5	25	99	75	70	66	61	52	
8SP77-6	22	30	119	90	83	79	74	63	
8SP77-7	26	35	139	105	97	92	86	74	
8SP77-8	30	40	159	120	111	105	99	84	
8SP77-10	37	50	198	150	140	131	123	105	
8SP77-12	45	60	238	180	166	157	148	126	
8SP77-15	55	75	297	225	208	196	185	157	
8SP77-17	63	85	337	255	235	222	210	178	
8SP77-20	75	100	397	300	280	262	246	210	

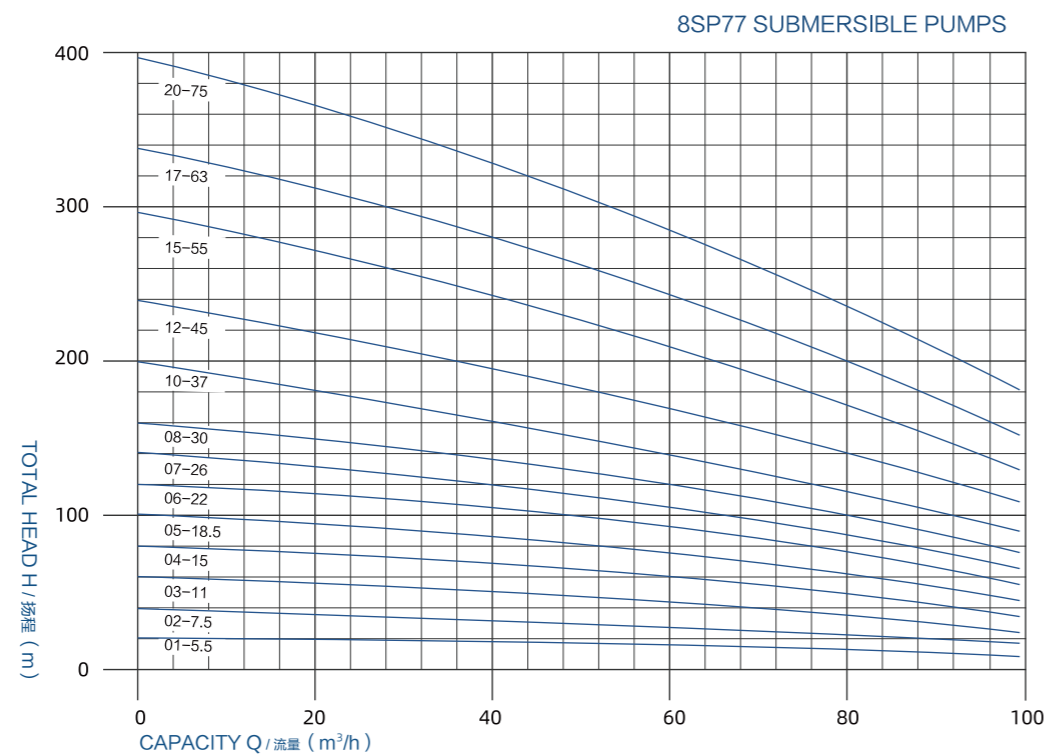

Professional manufacture of stainless steel pumps

# 8SP95

# 8"


## STAINLESS STEEL SUBMERSIBLE PUMPS

► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ185mm  
最大直径 φ185毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c


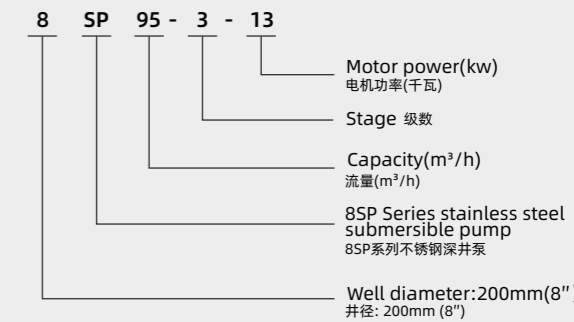


► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G4"~ G5"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
	KW	Hp	l/min	0	1000	1333	1500	1583	1666	1833
50Hz			m³/h	0	60	80	90	95	100	110
8SP95-1	5.5	7.5	21	16	14	13	12	11	9	
8SP95-2	9.2	12.5	41	31	28	25	24	22	18	
8SP95-3	13	17.5	61	47	41	38	36	33	28	
8SP95-4	18.5	25	82	62	55	50	48	45	37	
8SP95-5	22	30	102	78	69	63	60	56	46	
8SP95-6	26	35	123	94	83	76	72	67	55	
8SP95-8	37	50	163	124	110	100	96	89	73	
8SP95-10	45	60	204	155	137	125	120	112	92	
8SP95-11	55	75	225	172	152	139	132	123	101	
8SP95-12	55	75	246	187	165	151	144	135	111	
8SP95-14	63	85	285	218	193	176	168	157	129	
8SP95-16	75	100	326	249	220	199	193	179	147	
8SP95-20	93	125	408	312	276	252	240	224	184	

Diffuser Height (导叶壳高度)  
128/104mm

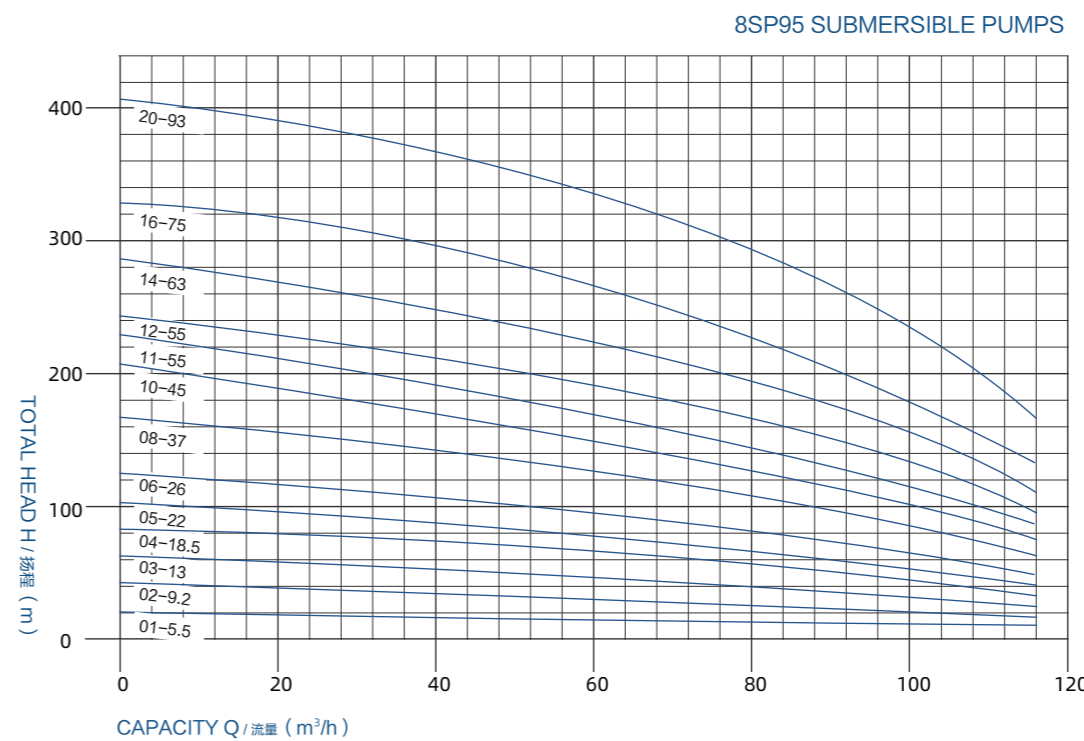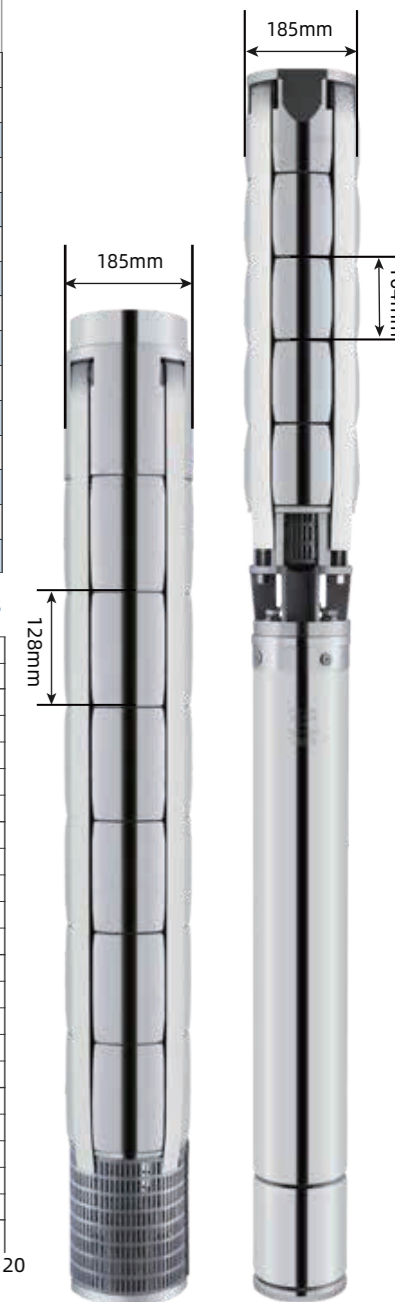

# 8"

# 8SP120

Professional manufacture of stainless steel pumps



## STAINLESS STEEL SUBMERSIBLE PUMPS




► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ185mm  
最大直径 φ185毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c


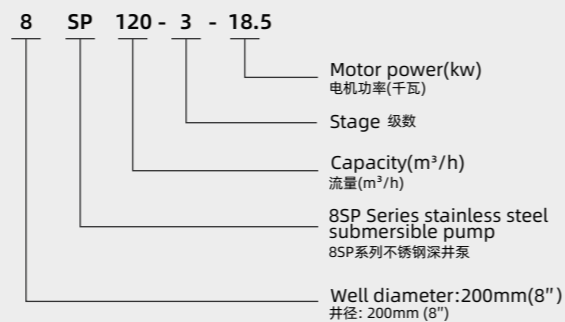


Diffuser Height (导叶壳高度) : 128mm

► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G5"

Type/型号	Motor power 功率		Capacity and head/流量和扬程							
			l/min	0	1000	1666	1833	2000	2166	2500
50Hz	KW	Hp	m³/h	0	60	100	110	120	130	150
			Head 扬程 (m)	0	22	17	14	13	12	10
8SP120-1	7.5	10	22	17	14	13	12	10	3	
8SP120-2	13	17.5	44	35	28	26	24	20	9	
8SP120-3	18.5	25	66	53	42	39	36	30	10	
8SP120-4	22	30	88	70	57	50	48	40	13	
8SP120-5	30	40	110	88	71	65	60	50	16	
8SP120-6	37	50	132	105	85	78	72	60	20	
8SP120-7	45	60	154	123	100	91	84	70	23	
8SP120-8	55	75	176	140	114	105	96	80	26	
8SP120-9	55	75	198	158	128	117	108	90	29	
8SP120-10	63	85	220	176	143	130	120	100	32	

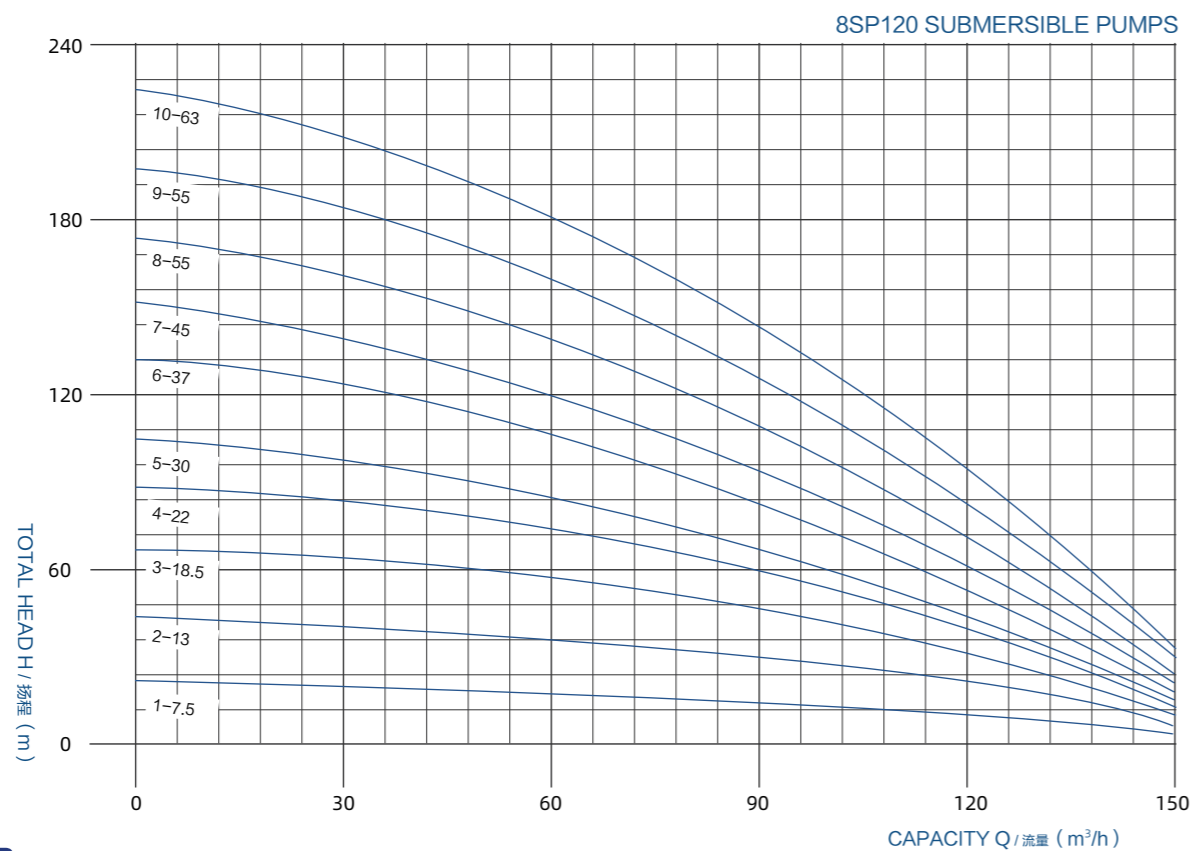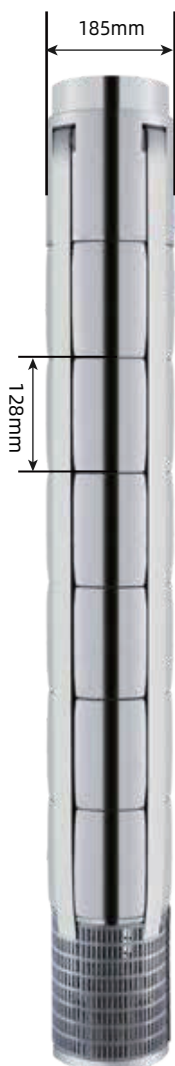

Professional manufacture of stainless steel pumps

# 10SP125

## STAINLESS STEEL SUBMERSIBLE PUMPS


# 10"

► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ210mm  
最大直径 φ210毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c


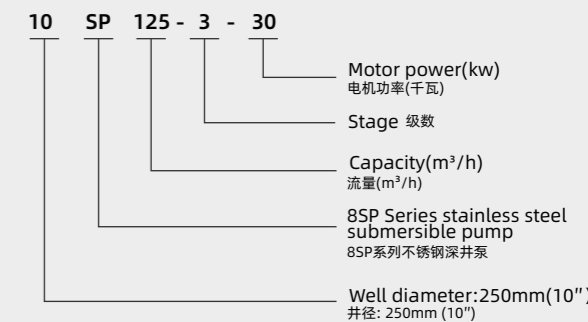


Diffuser Height (导叶壳高度) : 156mm

► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G6"

型号/Type	功率 Motor power		流量和扬程/Capacity and head								
			l/min	0	833	1333	1666	2000	2333	2666	Length
Three phase 380-415v- 50Hz	KW	Hp	m³/h	0	50	80	100	125	140	160	mm
			扬程 Head (m)	0	30	28	24	22	20	17	13
10SP125-1	11	15	30	28	24	22	20	17	13	616	
10SP125-2	22	30	59	55	49	45	40	35	26	772	
10SP125-3	30	40	87	83	74	67	60	53	40	928	
10SP125-4	45	60	115	110	98	91	80	70	52	1084	
10SP125-5	55	75	146	141	127	118	100	95	62	1240	
10SP125-6	63	85	178	165	142	130	120	100	75	1396	
10SP125-7	75	100	208	192	165	152	140	115	89	1552	
10SP125-8	93	125	235	220	189	172	160	132	100	1708	
10SP125-9	93	125	264	248	214	195	180	150	112	1864	

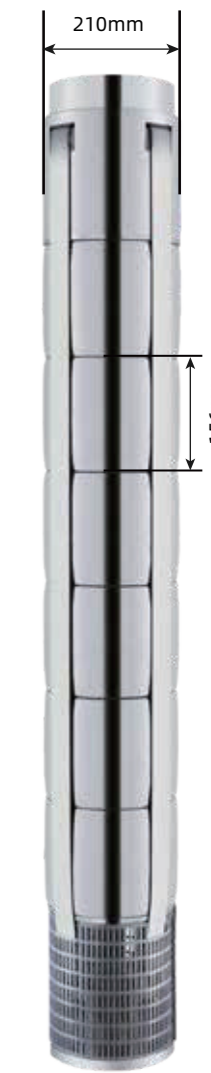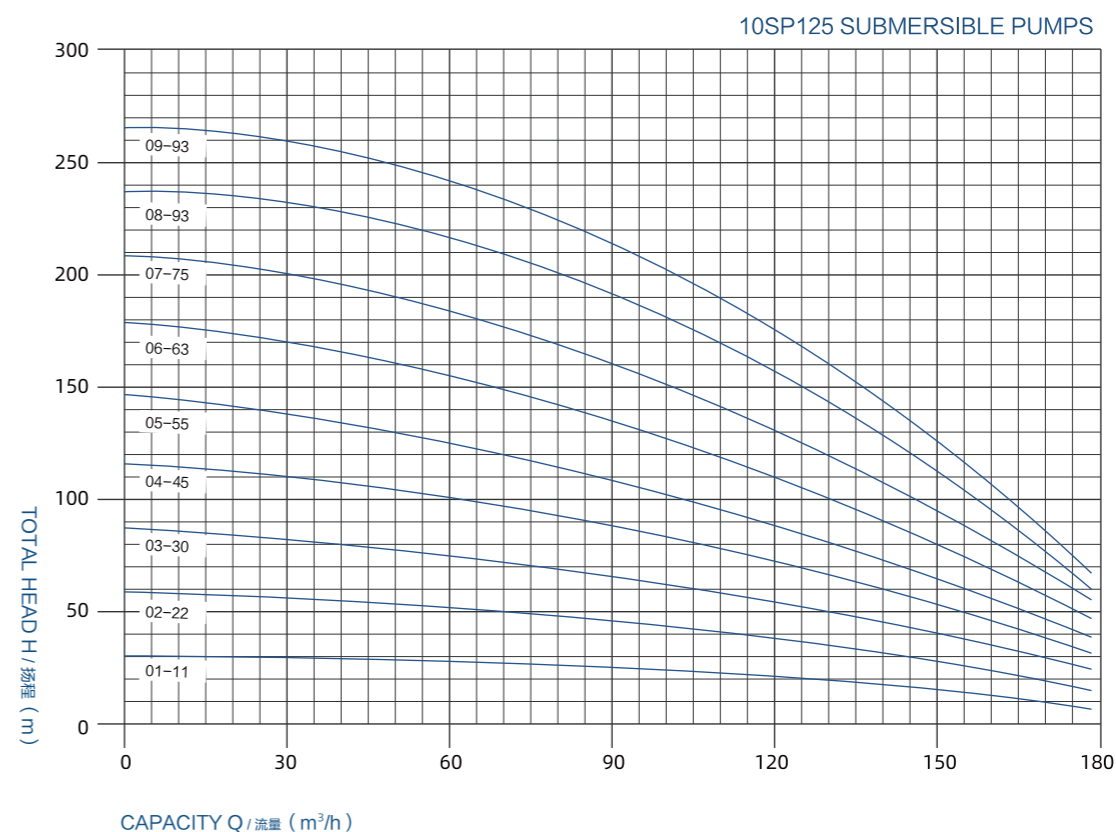

# 10"

# 10SP160

Professional manufacture of stainless steel pumps




## STAINLESS STEEL SUBMERSIBLE PUMPS ACTROSPUMP

► Applications Environment:

- Water supply system
- High- rise supercharging
- Garden and farmland irrigation
- Pumping ground water
- Various industrial applications

► Pump/Motor 泵/马达

- Adopted the NEMA standard  
采用了NEMA标准
- Insulation class:E  
绝缘等级: E
- Protection grade:IP 68  
保护等级: IP 68
- Maximum diameter Φ210mm  
最大直径 φ210毫米
- Highest temperature of liquid:35°C  
液体的最高温度: 35 °c

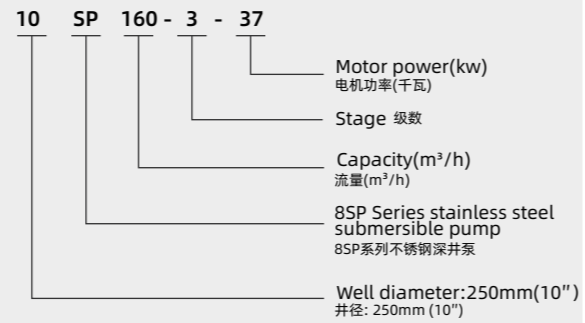

Diffuser Height  
(导叶壳高度)  
156mm



► PERFORMANCE TABLE / 性能表:

rpm / 转速: 2850 Outlet / 出水口: G6"

Type/型号	Motor power 功率		Capacity and head/流量和扬程						
			I/min	0	1666	2000	2666	3000	Length
50Hz	KW	Hp	m³/h	0	100	120	160	180	mm
10SP160-1	13	17.5	33	25	23	18	15	616	
10SP160-2	26	35	65	50	46	36	30	772	
10SP160-3	37	50	99	75	69	55	45	928	
10SP160-4	55	75	132	100	92	72	60	1084	
10SP160-5	63	85	16	135	115	90	76	1240	
10SP160-6	75	100	298	150	138	110	92	1396	
10SP160-7	93	125	231	175	161	128	110	1552	
10SP160-8	93	125	264	200	183	142	125	1708	
10SP160-9	110	150	297	225	205	160	142	1864	

